

 **CARLIKE**TM  **PREMIUM⁺**
CAR WRAPPING VINYL
CARLIKE MAKE YOUR CAR SPECIAL





CARLIKETM



PREMIUM⁺
CAR WRAPPING VINYL

CARLIKE MAKE YOUR CAR SPECIAL

10 YEARS

**CAR WRAPPING VINYL
PRODUCTION EXPERIENCE**



CARLIKETM



PREMIUM⁺
CAR WRAPPING VINYL

CARLIKE MAKE YOUR CAR SPECIAL

CARLIKE, launched in 2012 as a brand of SINO GROUP, mainly focus on premium car wrapping vinyls, with rich colors and stylish designs. High performance with economic price is always the pursuit of CARLIKE.



Matte Electro

Metallic Vinyl

Gloss Electro

Metallic Vinyl

Chameleon Electro

Metallic Vinyl

Macaron Vinyl



Mysterious Chrome

Rainbow Vinyl

Iridescence

Laser Vinyl

Magic Coral

Vinyl

Chrome Ceramics

Vinyl

PRODUCT CATALOGUE



Chrome Laser

Vinyl

Aluminum Brushed

Vinyl

Printed Camouflage

Vinyl

Super Gloss Vinyl



6D Carbon

Fiber Vinyl

Car Light Film

Super Gloss

Sunroof Film

TPU Paint

Protection Film



Super Stretch

CARLIKE™ vinyl wrap is made by high polymeric pvc film.
With very high stretchability, the film is very easy to wrap for the curves and full car body.



Kneading


After Heating

Incredible Restorable

When you use the film
if the film wrinkled
heating membrane can be restored




Super Density
Air Channels




Removable Glue

Solvent-based acrylic low viscosity glue
Professional honeycomb air channels
after remove non residual glue
Do not damage the original paint


PRODUCT TECHNOLOGY




**HIGH POLYMERIC
DOUBLE CASTING**




**AIR FREE
TECH+**



**MICRO
AIR CHANNEL**



**LOW
INITIAL TACK**



**SUPER
STRETCH**



**DURABILITY
5 YEARS**





3000 Series - PET

New Premium + Car Wrapping Vinyl

- + Double casting film
- + Super air channels
- + PET release paper
- + Smooth surface
- + No cellulite



VS




New 3000 Series - PET
Surface without cellulites

Normal Quality
Surface with cellulites





Glue layer super air channels



PET transparent release paper


- 01. Top film layer
- 02. Color layer
- 03. Bottom film layer
- 04. Glue layer
- 05. PET transparent release paper

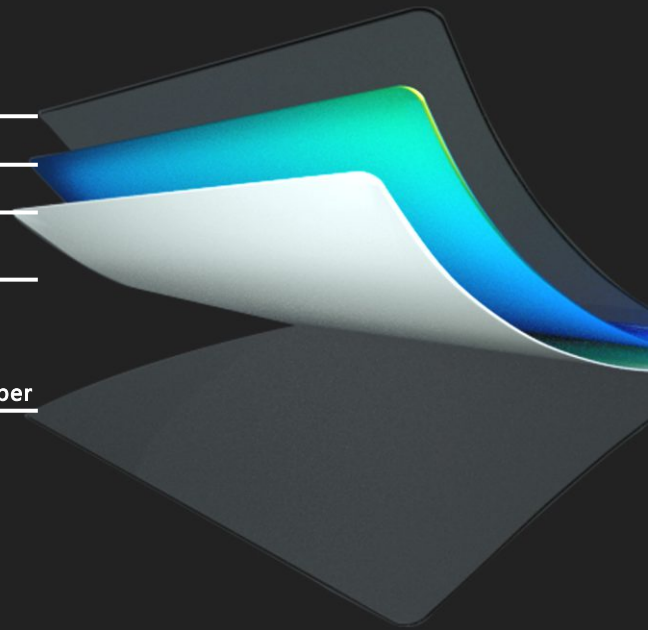

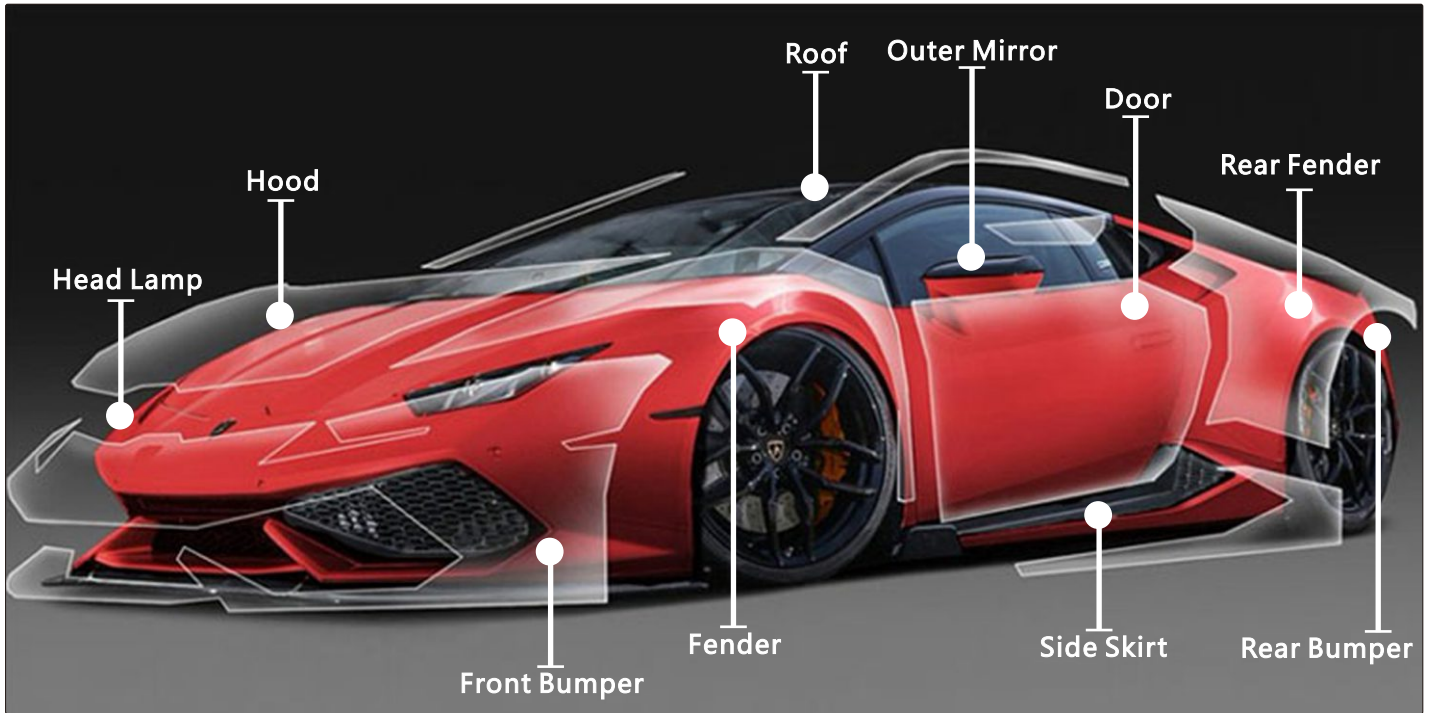

TPU PPF

- Heat healing
- Anti-yellowing
- Scratch resistance
- Car paint brightness increased 40%

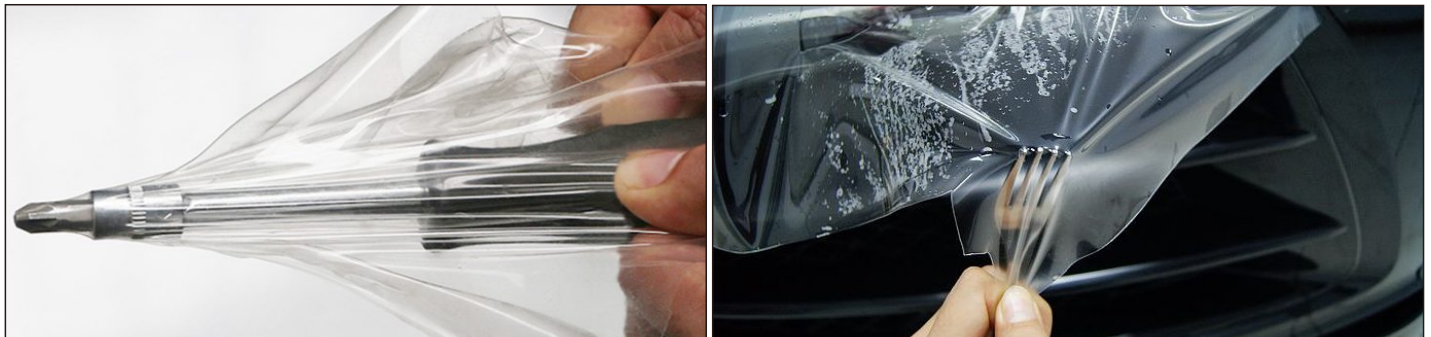

Super toughness & Anti-scratched
The vinyl can be restored after heating



CARLIKE™ **PREMIUM+**
CAR WRAPPING VINYL
CARLIKE MAKE YOUR CAR SPECIAL



TPH PPF

- + Heat Healing
- Anti-yellowing
- ✓ 360° Protection



1. Spray water on it



2. Stick it on car body



3. Stretch it to flat



4. Use squeegee and heat gun, get bubbles out




5. Cut off extra part



6. Finished

TPU Paint Protection Film

Series	5000
Warranty	5 Years
Brand	CARLIKE™
Size	1.52x15M/5x49FT
Raw material	USA material
Model number	CL-TPU
Characteristic	Heat repair
Film thickness	190micron, 7.6mil
Adhesive thickness	30µm
Repair coating	10µm
Durability	5-7 Years
Application temperature	From +80°C to +120°C
Temperature resistance	From -50°C to +130°C
Breaking strength	40.7 N/10mm
Peel adhesion	2.1 N
Gray Level	4-5

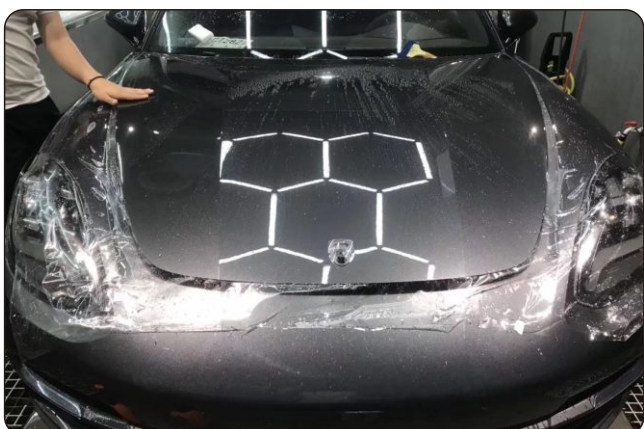

TPU Car Wrap Vinyl

Series	5000
Warranty	5 Years
Brand	CARLIKE™
Size	1.52x16.5M/5x54FT
Raw material	USA material
Model number	CL-TPU
Characteristic	Heat repair
Film thickness	200micron, 8mil
Adhesive thickness	30µm
Repair coating	10µm
Durability	5-7 Years
Application temperature	From +80°C to +120°C
Temperature resistance	From -50°C to +130°C
Breaking strength	40.7 N/10mm
Peel adhesion	2.1 N
Gray Level	4-5



TPH Paint Protection Film

Series	5000
Warranty	3 Years
Brand	CARLIKE™
Size	1.52x15M/5x49FT
Raw material	JAPAN material
Model number	CL-TPH
Characteristic	Heat repair
Film thickness	160micron, 6.4mil
Adhesive thickness	30µm
Repair coating	10µm
Durability	3-5 Years
Application temperature	From +80°C to +120°C
Temperature resistance	From -50°C to +130°C
Breaking strength	25.9 N/10mm
Peel adhesion	1 N
Gray Level	4-5



TPH PPF

Heat Healing
Anti-yellowing
360° Protection

PET Diamond Crystal Vinyl

Series	3000P
Warranty	3 Years
Brand	CARLIKE™
Size	1.52x18M/5x59FT
Model number	CL-DC
Film produce technology	High polymeric with double casting
Adhesive type	Initial low viscosity glue
Film thickness	170micron, 6.8mil
Adhesive thickness	30µm
Air bubble free	Yes
Durability	3-5 Years
Application temperature	From +80°C to +120°C
Temperature resistance	From -50°C to +130°C
Breaking strength	37.2 N/10mm
Peel adhesion	2.5 N
Gray Level	4-5



CL-DC-01P
Gloss Black PET



CL-DC-02P
Gloss White PET




PET Iridescence Laser Vinyl

Series	3000P
Warranty	3 Years
Brand	CARLIKE™
Size	1.52x18M/5x59FT
Model number	CL-IL
Film produce technology	High polymeric with double casting
Adhesive type	Initial low viscosity glue
Film thickness	170micron, 6.8mil
Adhesive thickness	30µm
Air bubble free	Yes
Durability	3-5 Years
Application temperature	From +80°C to +120°C
Temperature resistance	From -50°C to +130°C
Breaking strength	37.2 N/10mm
Peel adhesion	2.5 N
Gray Level	4-5



CL-IL-02P
White PET

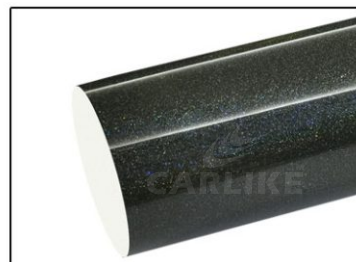


CL-IL-05P
Black PET




PET Super Gloss Crystal Vinyl

Series	3000P
Warranty	3 Years
Brand	CARLIKE™
Size	1.52x18M/5x59FT
Model number	CL-SV
Film produce technology	High polymeric with double casting
Adhesive type	Initial low viscosity glue
Film thickness	160micron, 6.4mil
Adhesive thickness	30µm
Air bubble free	Yes
Durability	3-5 Years
Application temperature	From +80°C to +120°C
Temperature resistance	From -50°C to +130°C
Breaking strength	37.2 N/10mm
Peel adhesion	2.5 N
Gray Level	4-5

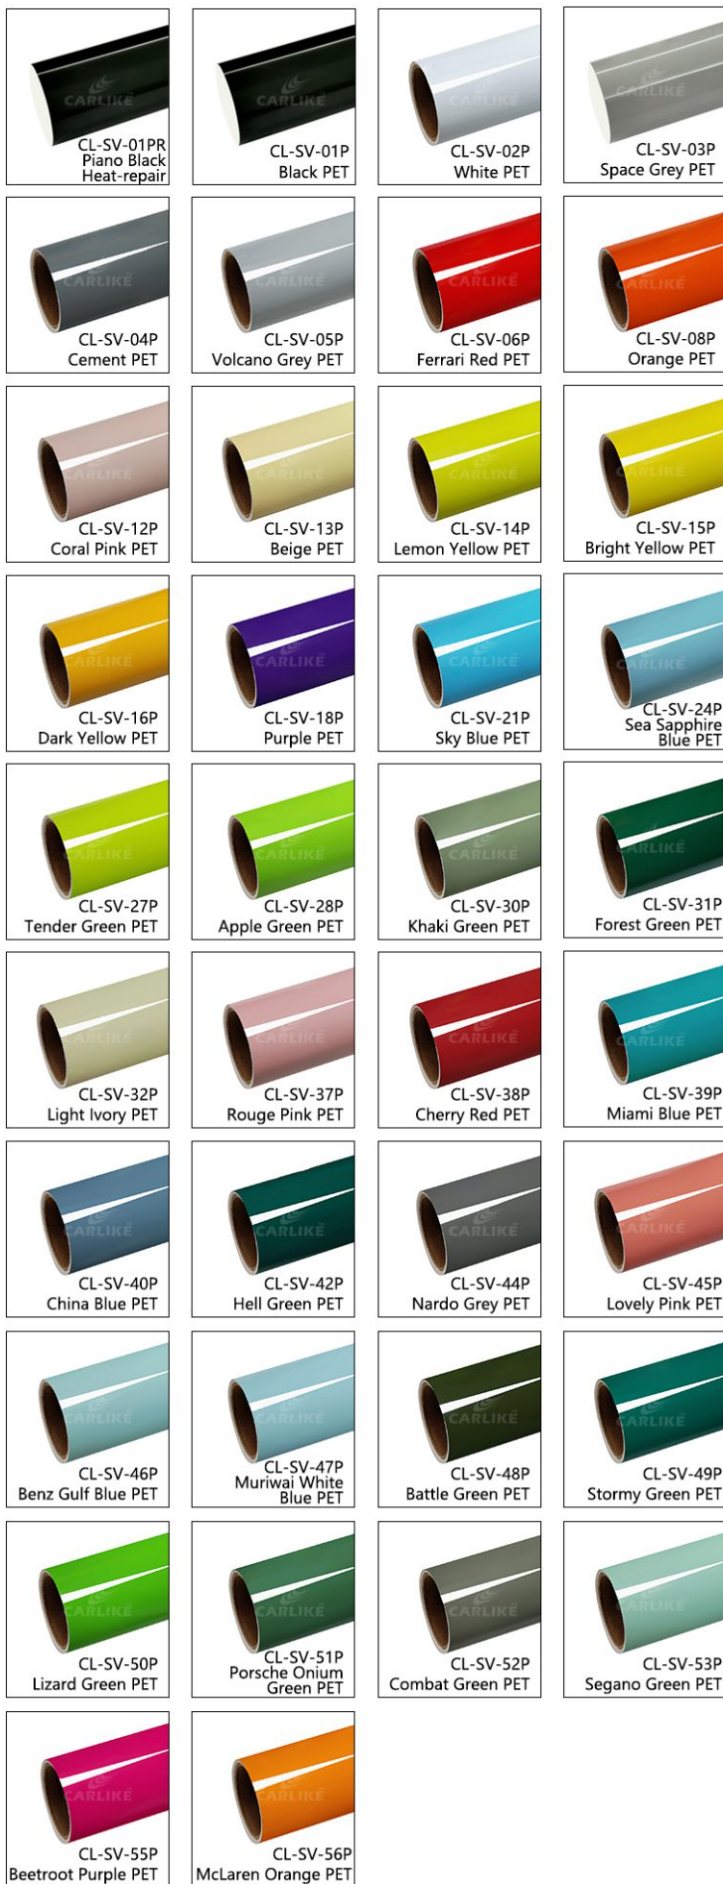


PET Paint Metallic Vinyl

Series	3000P
Warranty	3 Years
Brand	CARLIKE™
Size	1.52x18M/5x59FT
Model number	CL-PM
Film produce technology	High polymeric with double casting
Adhesive type	Initial low viscosity glue
Film thickness	160micron, 6.4mil
Adhesive thickness	30µm
Air bubble free	Yes
Durability	3-5 Years
Application temperature	From +80°C to +120°C
Temperature resistance	From -50°C to +130°C
Breaking strength	37.2 N/10mm
Peel adhesion	2.5 N
Gray Level	4-5

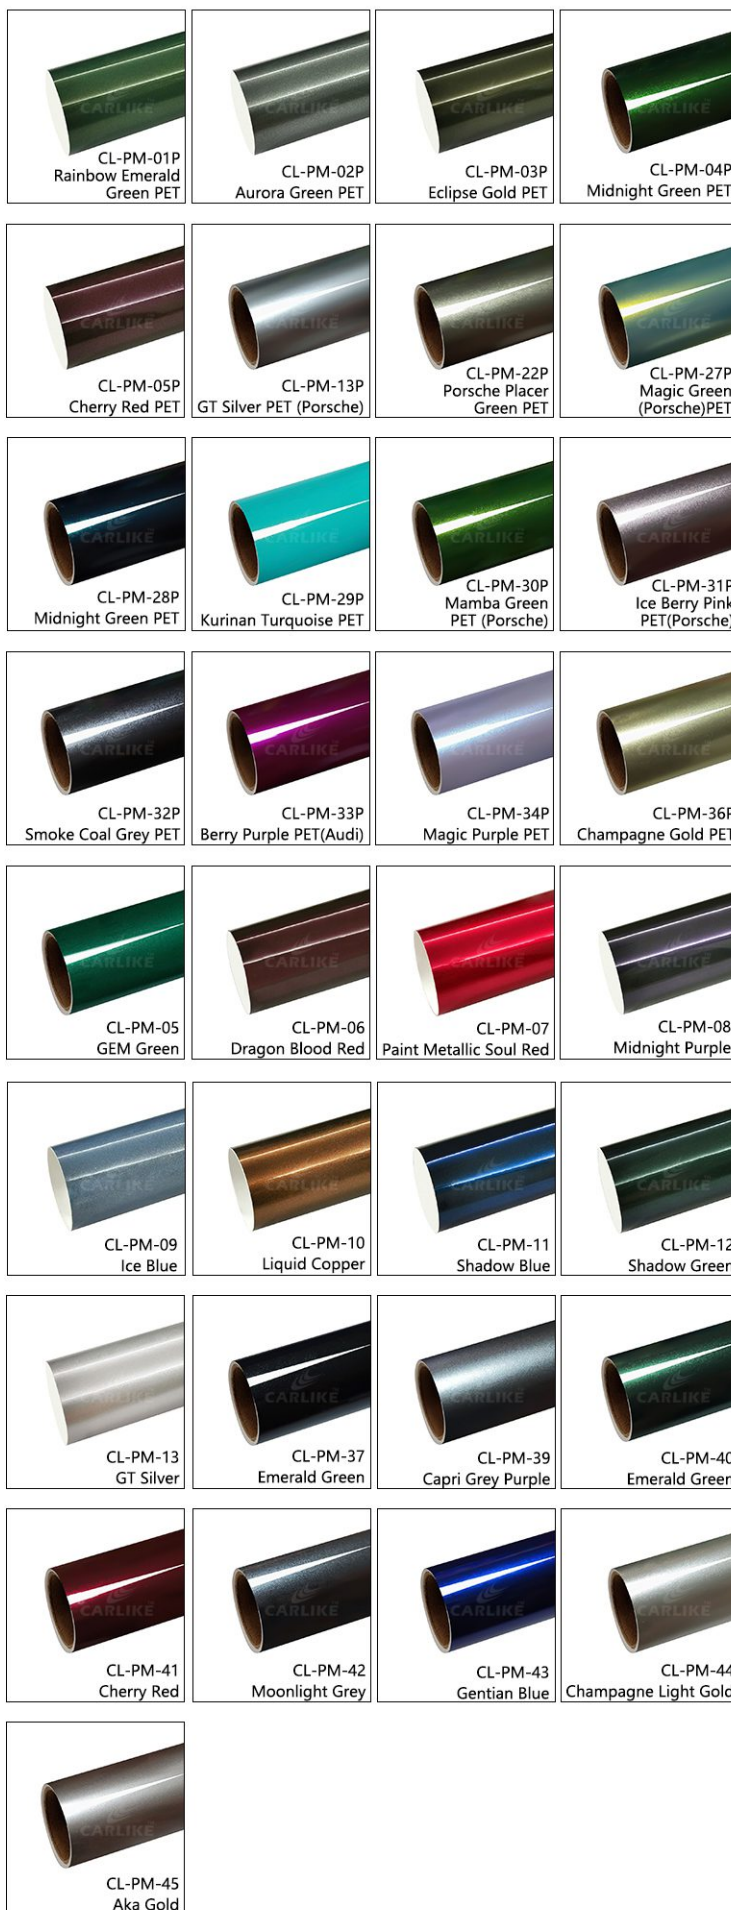


PET Liquid Metallic Vinyl

Series	3000P
Warranty	3 Years
Brand	CARLIKE™
Size	1.52x18M/5x59FT
Model number	CL-LM
Film produce technology	High polymeric with double casting
Adhesive type	Initial low viscosity glue
Film thickness	170micron, 6.8mil
Adhesive thickness	30µm
Air bubble free	Yes
Durability	3-5 Years
Application temperature	From +80°C to +120°C
Temperature resistance	From -50°C to +130°C
Breaking strength	37.2 N/10mm
Peel adhesion	2.5 N
Gray Level	4-5

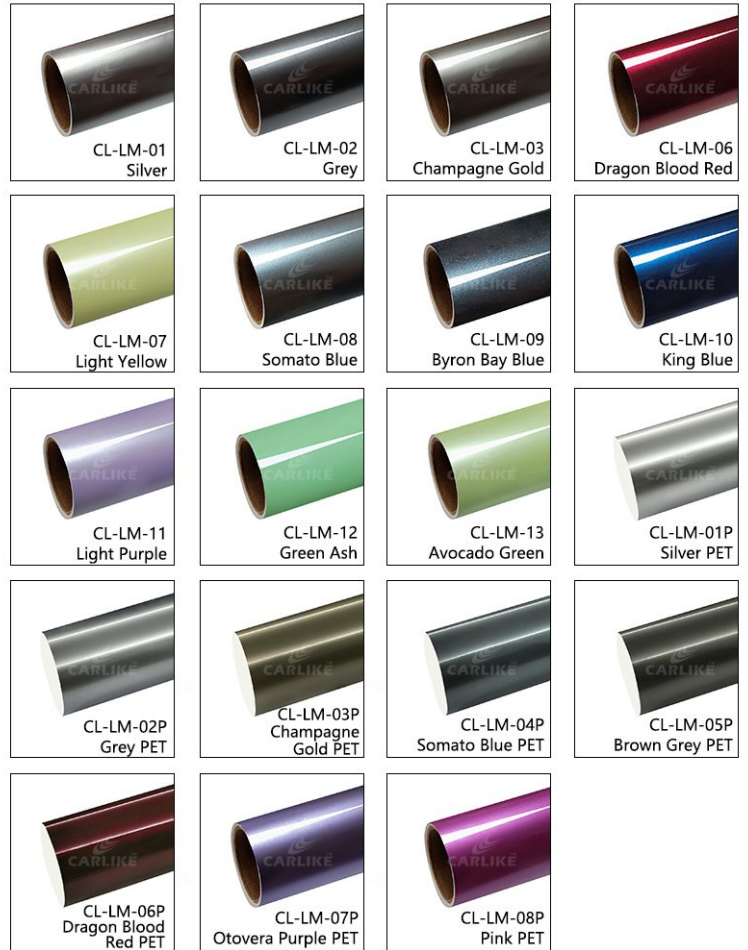

PET Super Gloss Metallic Vinyl

Series	3000P
Warranty	3 Years
Brand	CARLIKE™
Size	1.52x18M/5x59FT
Model number	CL-GE
Film produce technology	High polymeric with double casting
Adhesive type	Initial low viscosity glue
Film thickness	170micron, 6.8mil
Adhesive thickness	30µm
Air bubble free	Yes
Durability	3-5 Years
Application temperature	From +80°C to +120°C
Temperature resistance	From -50°C to +130°C
Breaking strength	37.2 N/10mm
Peel adhesion	2.5 N
Gray Level	4-5

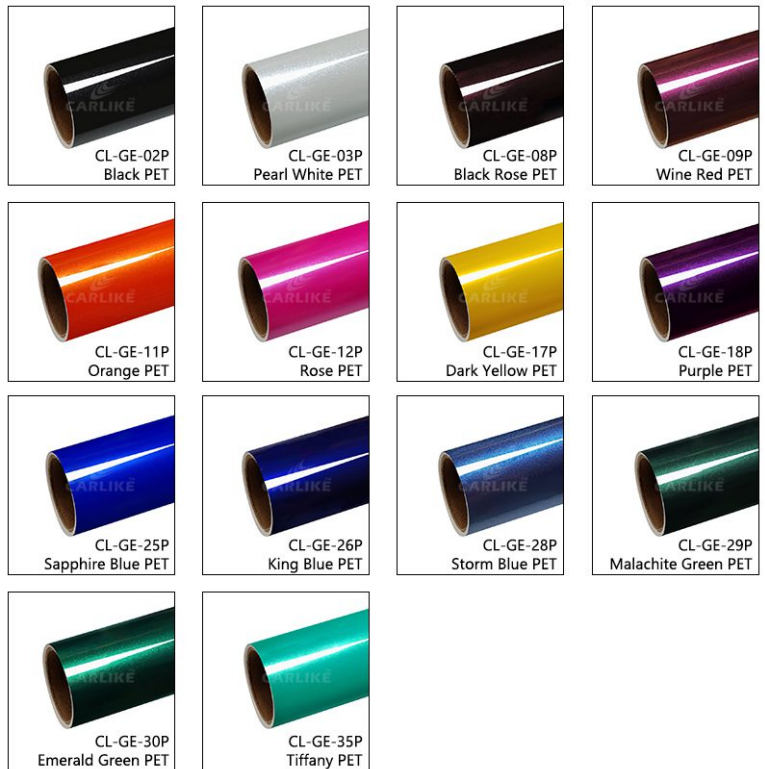



PET Chameleon Color Shift Vinyl

Series	3000P
Warranty	3 Years
Brand	CARLIKE™
Size	1.52x18M/5x59FT
Model number	CL-CS
Film produce technology	High polymeric with double casting
Adhesive type	Initial low viscosity glue
Film thickness	160micron, 6.4mil
Adhesive thickness	30µm
Air bubble free	Yes
Durability	3-5 Years
Application temperature	From +80°C to +120°C
Temperature resistance	From -50°C to +130°C
Breaking strength	37.2 N/10mm
Peel adhesion	2.5 N
Gray Level	4-5




Chrome Laser Vinyl

Series	3000P
Warranty	3 Years
Brand	CARLIKE™
Size	1.52x18M/5x59FT
Model number	CL-LS
Film produce technology	High polymeric with double casting
Adhesive type	Initial low viscosity glue
Film thickness	160micron, 6.4mil
Adhesive thickness	30µm
Air bubble free	Yes
Durability	3-5 Years
Application temperature	From +80°C to +120°C
Temperature resistance	From -50°C to +130°C
Breaking strength	37.2 N/10mm
Peel adhesion	2.5 N
Gray Level	4-5

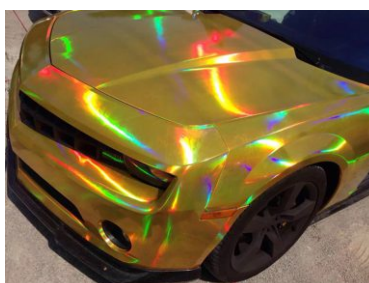


Frosted Metallic Vinyl

Series	3000
Warranty	3 Years
Brand	CARLIKE™
Size	1.52x18M/5x59FT
Model number	CL-FM
Film produce technology	High polymeric with double casting
Adhesive type	Initial low viscosity glue
Film thickness	170micron, 6.8mil
Adhesive thickness	30µm
Air bubble free	Yes
Durability	3-5 Years
Application temperature	From +80°C to +120°C
Temperature resistance	From -50°C to +130°C
Breaking strength	37.2 N/10mm
Peel adhesion	2.5 N
Gray Level	4-5

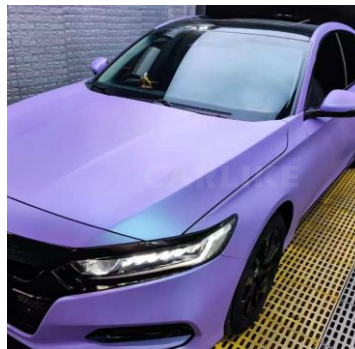

Super Heavy Metallic Vinyl

Series	3000
Warranty	3 Years
Brand	CARLIKE™
Size	1.52x18M/5x59FT
Model number	CL-HV
Film produce technology	High polymeric with double casting
Adhesive type	Initial low viscosity glue
Film thickness	160micron, 6.4mil
Adhesive thickness	30µm
Air bubble free	Yes
Durability	3-5 Years
Application temperature	From +80°C to +120°C
Temperature resistance	From -50°C to +130°C
Breaking strength	37.2 N/10mm
Peel adhesion	2.5 N
Gray Level	4-5

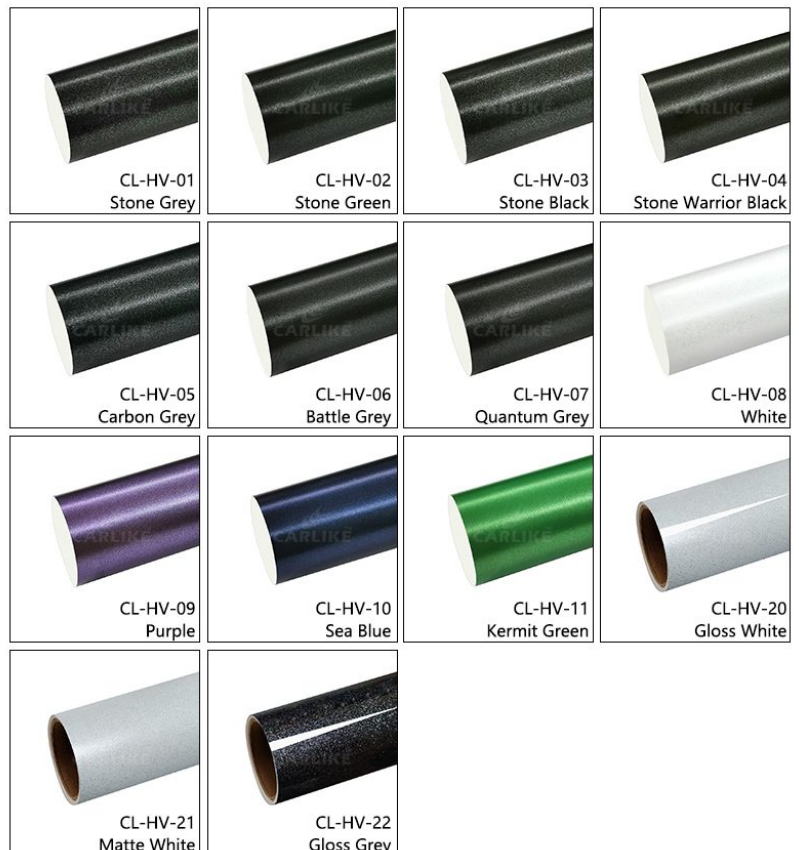

Magic Diamond Vinyl

Series	3000P
Warranty	3 Years
Brand	CARLIKE™
Size	1.52x18M/5x59FT
Model number	CL-MD
Film produce technology	High polymeric with double casting
Adhesive type	Initial low viscosity glue
Film thickness	160micron, 6.4mil
Adhesive thickness	30µm
Air bubble free	Yes
Durability	3-5 Years
Application temperature	From +80°C to +120°C
Temperature resistance	From -50°C to +130°C
Breaking strength	37.2 N/10mm
Peel adhesion	2.5 N
Gray Level	4-5




Super Chrome Metallic Vinyl

Series	3000
Warranty	3 Years
Brand	CARLIKE™
Size	1.52x18M/5x59FT
Model number	CL-CH
Film produce technology	High polymeric with double casting
Adhesive type	Initial low viscosity glue
Film thickness	160micron, 6.4mil
Adhesive thickness	30µm
Air bubble free	Yes
Durability	3-5 Years
Application temperature	From +80°C to +120°C
Temperature resistance	From -50°C to +130°C
Breaking strength	37.2 N/10mm
Peel adhesion	2.5 N
Gray Level	4-5



Matte Electro Metallic Vinyl

Series	3000
Warranty	3 Years
Brand	CARLIKE™
Size	1.52x18M/5x59FT
Model number	CL-EM
Film produce technology	High polymeric with double casting
Adhesive type	Initial low viscosity glue
Film thickness	170micron, 6.8mil
Adhesive thickness	30µm
Air bubble free	Yes
Durability	3-5 Years
Application temperature	From +80°C to +120°C
Temperature resistance	From -50°C to +130°C
Breaking strength	37.2 N/10mm
Peel adhesion	2.5 N
Gray Level	4-5

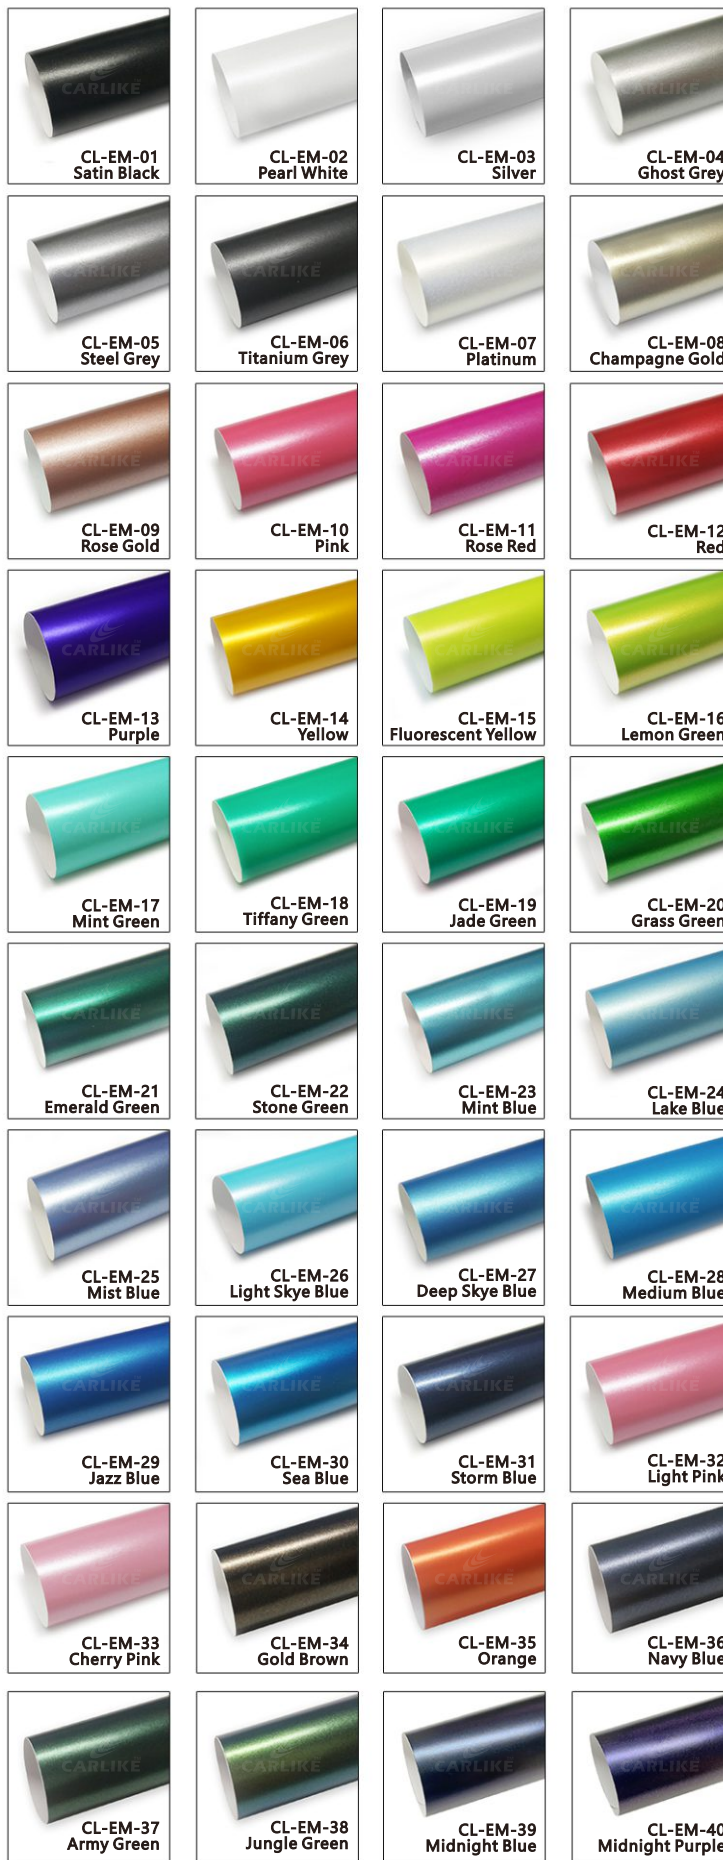

Gloss Electro Metallic Vinyl

Series	3000
Warranty	3 Years
Brand	CARLIKE™
Size	1.52x18M/5x59FT
Model number	CL-GE
Film produce technology	High polymeric with double casting
Adhesive type	Initial low viscosity glue
Film thickness	160micron, 6.4mil
Adhesive thickness	30µm
Air bubble free	Yes
Durability	3-5 Years
Application temperature	From +80°C to +120°C
Temperature resistance	From -50°C to +130°C
Breaking strength	37.2 N/10mm
Peel adhesion	2.5 N
Gray Level	4-5




Brushed Electro Metallic Vinyl

Series	3000
Warranty	3 Years
Brand	CARLIKE™
Size	1.52x18M/5x59FT
Model number	CL-EB
Film produce technology	High polymeric with double casting
Adhesive type	Initial low viscosity glue
Film thickness	190micron, 7.8mil
Adhesive thickness	30µm
Air bubble free	Yes
Durability	3-5 Years
Application temperature	From +80°C to +120°C
Temperature resistance	From -50°C to +130°C
Breaking strength	37.2 N/10mm
Peel adhesion	2.5 N
Gray Level	4-5



Magic Electro Metallic Vinyl

Series	3000
Warranty	3 Years
Brand	CARLIKE™
Size	1.52x18M/5x59FT
Model number	CL-ME
Film produce technology	High polymeric with double casting
Adhesive type	Initial low viscosity glue
Film thickness	180micron, 7.2mil
Adhesive thickness	30µm
Air bubble free	Yes
Durability	3-5 Years
Application temperature	From +80°C to +120°C
Temperature resistance	From -50°C to +130°C
Breaking strength	37.2 N/10mm
Peel adhesion	2.5 N
Gray Level	4-5



Chameleon Electro Metallic Vinyl

Series	3000
Warranty	3 Years
Brand	CARLIKE™
Size	1.52x18M/5x59FT
Model number	CL-CE
Film produce technology	High polymeric with double casting
Adhesive type	Initial low viscosity glue
Film thickness	170micron, 6.8mil
Adhesive thickness	30µm
Air bubble free	Yes
Durability	3-5 Years
Application temperature	From +80°C to +120°C
Temperature resistance	From -50°C to +130°C
Breaking strength	37.2 N/10mm
Peel adhesion	2.5 N
Gray Level	4-5




Macaron Vinyl

Series	3000
Warranty	3 Years
Brand	CARLIKE™
Size	1.52x18M/5x59FT
Model number	CL-MA
Film produce technology	High polymeric with double casting
Adhesive type	Initial low viscosity glue
Film thickness	170micron, 6.8mil
Adhesive thickness	30µm
Air bubble free	Yes
Durability	3-5 Years
Application temperature	From +80°C to +120°C
Temperature resistance	From -50°C to +130°C
Breaking strength	37.2 N/10mm
Peel adhesion	2.5 N
Gray Level	4-5



Iridescence Laser Vinyl

Series	3000
Warranty	3 Years
Brand	CARLIKE™
Size	1.52x18M/5x59FT
Model number	CL-IL
Film produce technology	High polymeric with double casting
Adhesive type	Initial low viscosity glue
Film thickness	160micron, 6.4mil
Adhesive thickness	30µm
Air bubble free	Yes
Durability	3-5 Years
Application temperature	From +80°C to +120°C
Temperature resistance	From -50°C to +130°C
Breaking strength	37.2 N/10mm
Peel adhesion	2.5 N
Gray Level	4-5

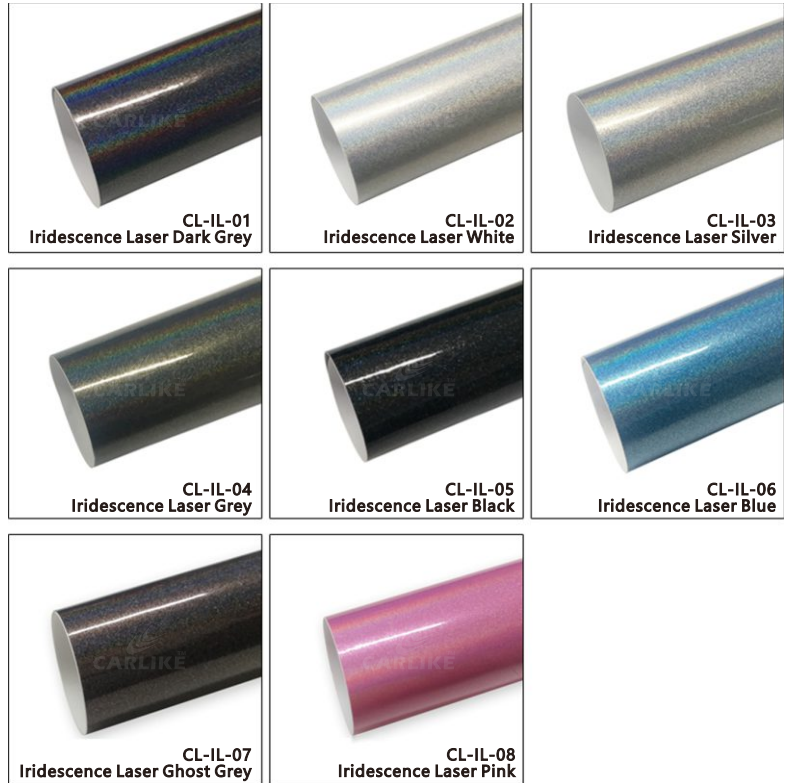

Magic Coral Vinyl

Series	3000
Warranty	3 Years
Brand	CARLIKE™
Size	1.52x18M/5x59FT
Model number	CL-MC
Film produce technology	High polymeric with double casting
Adhesive type	Initial low viscosity glue
Film thickness	160micron, 6.4mil
Adhesive thickness	30µm
Air bubble free	Yes
Durability	3-5 Years
Application temperature	From +80°C to +120°C
Temperature resistance	From -50°C to +130°C
Breaking strength	37.2 N/10mm
Peel adhesion	2.5 N
Gray Level	4-5




Diamond Crystal Vinyl

Series	3000
Warranty	3 Years
Brand	CARLIKE™
Size	1.52x18M/5x59FT
Model number	CL-DC
Film produce technology	High polymeric with double casting
Adhesive type	Initial low viscosity glue
Film thickness	170micron, 6.8mil
Adhesive thickness	30µm
Air bubble free	Yes
Durability	3-5 Years
Application temperature	From +80°C to +120°C
Temperature resistance	From -50°C to +130°C
Breaking strength	37.2 N/10mm
Peel adhesion	2.5 N
Gray Level	4-5




Chameleon Super Gloss Candy Vinyl

Series	3000
Warranty	3 Years
Brand	CARLIKE™
Size	1.52x18M/5x59FT
Model number	CL-CC
Film produce technology	High polymeric with double casting
Adhesive type	Initial low viscosity glue
Film thickness	160micron, 6.4mil
Adhesive thickness	30µm
Air bubble free	Yes
Durability	3-5 Years
Application temperature	From +80°C to +120°C
Temperature resistance	From -50°C to +130°C
Breaking strength	37.2 N/10mm
Peel adhesion	2.5 N
Gray Level	4-5

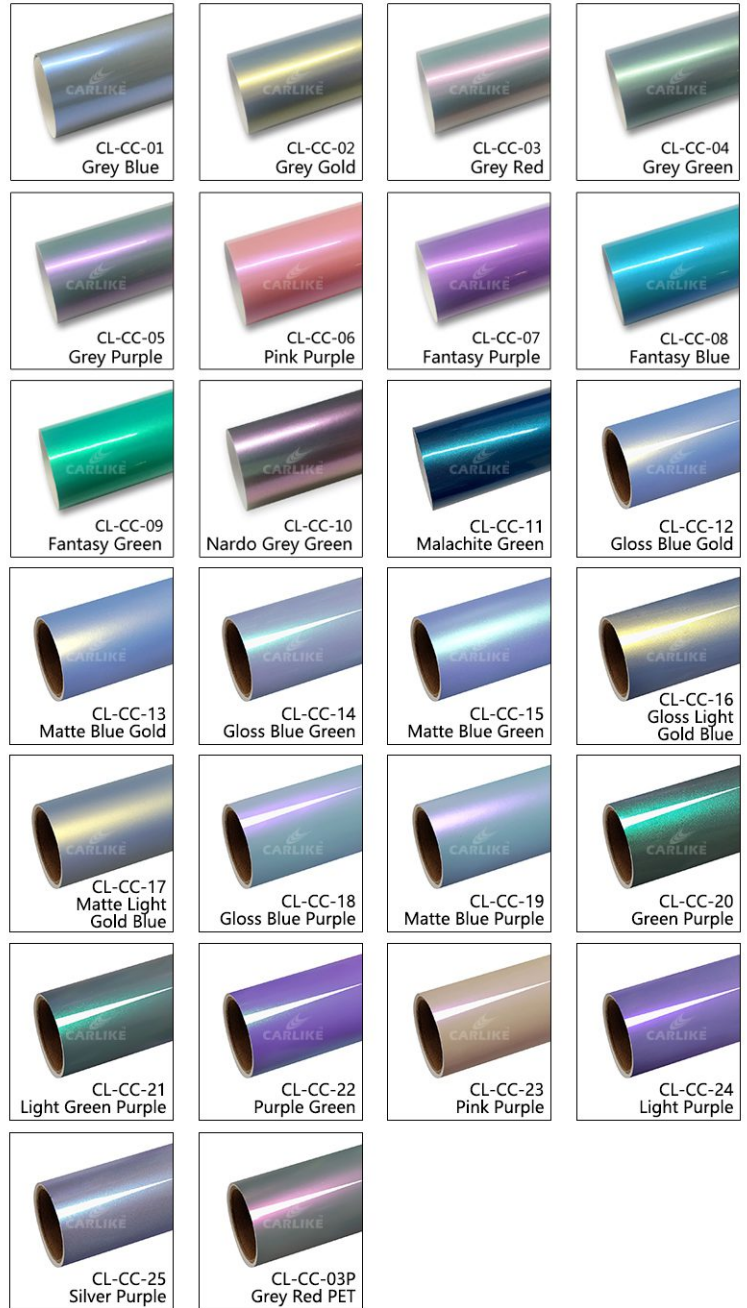

Super Gloss Candy Vinyl

Series	3000
Warranty	3 Years
Brand	CARLIKE™
Size	1.52x18M/5x59FT
Model number	CL-GC
Film produce technology	High polymeric with double casting
Adhesive type	Initial low viscosity glue
Film thickness	160micron, 6.4mil
Adhesive thickness	30µm
Air bubble free	Yes
Durability	3-5 Years
Application temperature	From +80°C to +120°C
Temperature resistance	From -50°C to +130°C
Breaking strength	37.2 N/10mm
Peel adhesion	2.5 N
Gray Level	4-5



Super Matte Chrome Ceramics Vinyl

Series	3000
Warranty	3 Years
Brand	CARLIKE™
Size	1.52x18M/5x59FT
Model number	CL-SC
Film produce technology	High polymeric with double casting
Adhesive type	Initial low viscosity glue
Film thickness	180micron, 6.8mil
Adhesive thickness	30µm
Air bubble free	Yes
Durability	3-5 Years
Application temperature	From +80°C to +120°C
Temperature resistance	From -50°C to +130°C
Breaking strength	37.2 N/10mm
Peel adhesion	2.5 N
Gray Level	4-5




3D Ghost Vinyl

Series	3000
Warranty	3 Years
Brand	CARLIKE™
Size	1.52x18M/5x59FT
Model number	CL-GH
Film produce technology	High polymeric with double casting
Adhesive type	Initial low viscosity glue
Film thickness	150micron, 6mil
Adhesive thickness	30µm
Air bubble free	Yes
Durability	3-5 Years
Application temperature	From +80°C to +120°C
Temperature resistance	From -50°C to +130°C
Breaking strength	37.2 N/10mm
Peel adhesion	2.5 N
Gray Level	



Super Gloss Crystal Vinyl

Series	3000
Warranty	3 Years
Brand	CARLIKE™
Size	1.52x18M/5x59FT
Model number	CL-SV
Film produce technology	High polymeric with double casting
Adhesive type	Initial low viscosity glue
Film thickness	160micron, 6.4mil
Adhesive thickness	30µm
Air bubble free	Yes
Durability	3-5 Years
Application temperature	From +80°C to +120°C
Temperature resistance	From -50°C to +130°C
Breaking strength	37.2 N/10mm
Peel adhesion	2.5 N
Gray Level	4-5

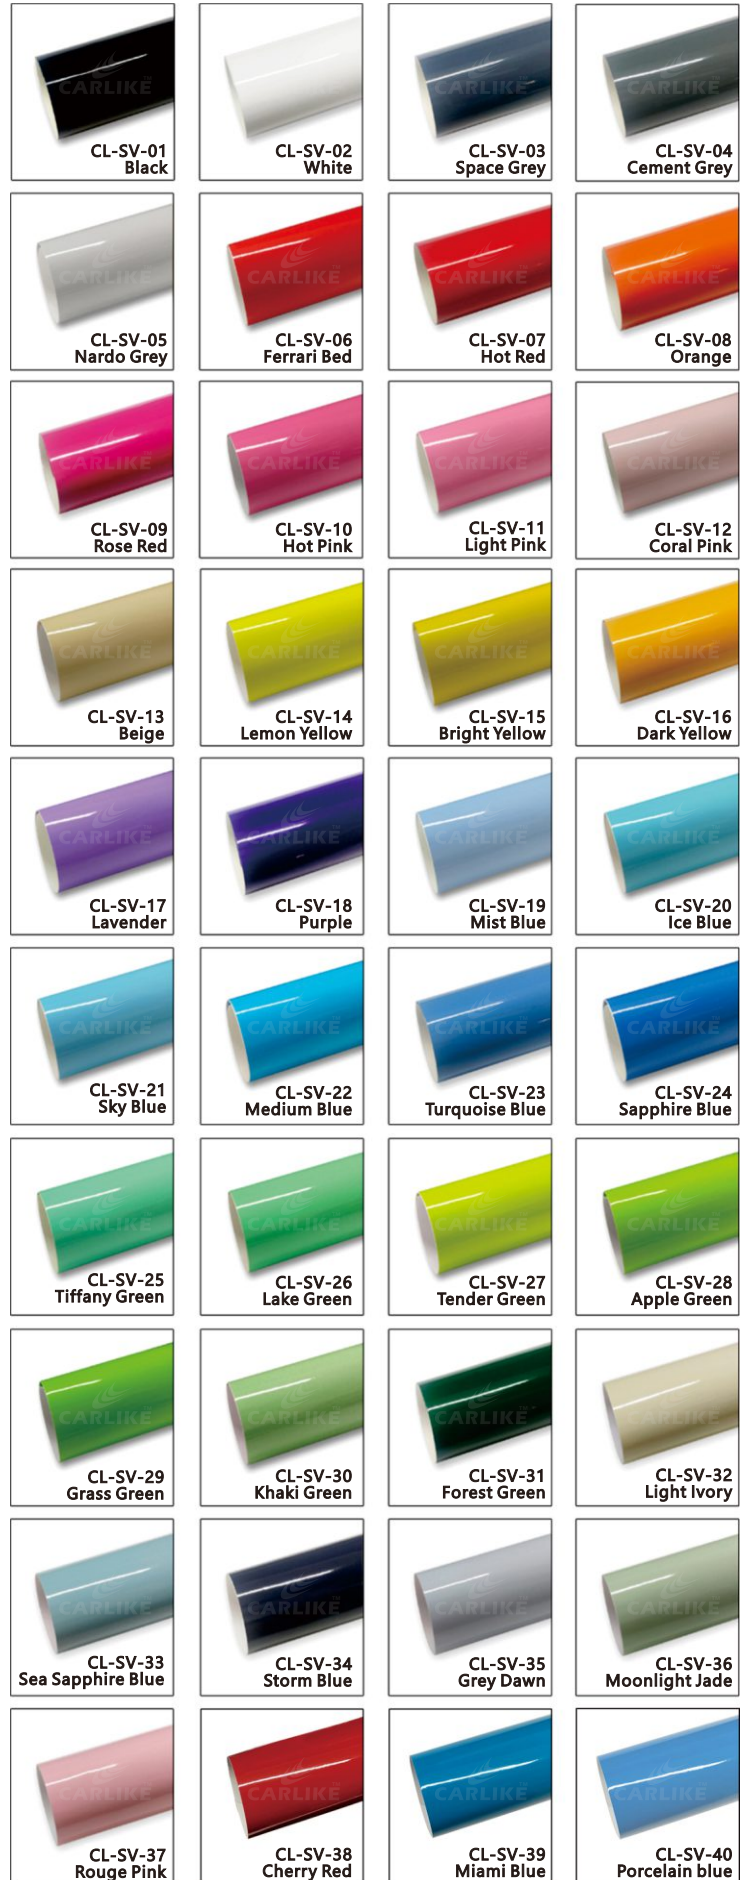

Super Matte Satin Vinyl

Series	3000
Warranty	3 Years
Brand	CARLIKE™
Size	1.52x18M/5x59FT
Model number	CL-MS
Film produce technology	High polymeric with double casting
Adhesive type	Initial low viscosity glue
Film thickness	160micron, 6.4mil
Adhesive thickness	30µm
Air bubble free	Yes
Durability	3-5 Years
Application temperature	From +80°C to +120°C
Temperature resistance	From -50°C to +130°C
Breaking strength	37.2 N/10mm
Peel adhesion	2.5 N
Gray Level	4-5



Super Chameleon Vinyl

Series	3000
Warranty	3 Years
Brand	CARLIKE™
Size	1.52x18M/5x59FT
Model number	CL-CV
Film produce technology	High polymeric with double casting
Adhesive type	Initial low viscosity glue
Film thickness	160micron, 6.4mil
Adhesive thickness	30µm
Air bubble free	Yes
Durability	3-5 Years
Application temperature	From +80°C to +120°C
Temperature resistance	From -50°C to +130°C
Breaking strength	37.2 N/10mm
Peel adhesion	2.5 N
Gray Level	4-5



CL-CV-01
Gloss Purple to Gold



CL-CV-02
Gloss Purplish Red Gold



CL-CV-03
Gloss King Blue Purple



CL-CV-04
Gloss Steel Blue Purple



CL-CV-05
Gloss Green Purple



CL-CV-06
Gloss Blue Purple



CL-CV-07
Gloss Malachite Green



CL-CV-11
Mattle Purple to Gold



CL-CV-12
Matte Purplish Red to Gold



CL-CV-13
Matte Deep Blue Purple



CL-CV-14
Matte Steel Blue to Purple



CL-CV-15
Matte Green to Purple



CL-CV-16
Matte Blue to Purple



Aurora White Vinyl

Series	3000
Warranty	3 Years
Brand	CARLIKE™
Size	1.52x18M/5x59FT
Model number	CL-AW
Film produce technology	High polymeric with double casting
Adhesive type	Initial low viscosity glue
Film thickness	160micron, 6.4mil
Adhesive thickness	30µm
Air bubble free	Yes
Durability	3-5 Years
Application temperature	From +80°C to +120°C
Temperature resistance	From -50°C to +130°C
Breaking strength	37.2 N/10mm
Peel adhesion	2.5 N
Gray Level	4-5



CL-AW-01
Matte White to Green Red



CL-AW-02
Gloss White to Green Red



Magic White Chameleon Vinyl


Series	3000
Warranty	3 Years
Brand	CARLIKE™
Size	1.52x18M/5x59FT
Model number	CL-MW
Film produce technology	High polymeric with double casting
Adhesive type	Removable glue
Film thickness	160micron, 6.4mil
Adhesive thickness	30µm
Air bubble free	Yes
Durability	3-5 Years
Application temperature	From +80°C to +120°C
Temperature resistance	From -50°C to +130°C
Breaking strength	37.2 N/10mm
Peel adhesion	2.5 N
Gray Level	4-5




CL-MW-01
Gloss White to Gold




CL-MW-02
Gloss White to Purple



CL-MW-03
Gloss White to Blue




CL-MW-04
Gloss White to Red



CL-MW-05
Matte White to Gold



CL-MW-06
Matte White to Purple



CL-MW-07
Matte White to Blue



CL-MW-08
Matte White to Red



Pearlescent White Vinyl

Series	3000
Warranty	3 Years
Brand	CARLIKE™
Size	1.52x18M/5x59FT
Model number	CL-PW
Film produce technology	High polymeric with double casting
Adhesive type	Initial low viscosity glue
Film thickness	160micron, 6.4mil
Adhesive thickness	30µm
Air bubble free	Yes
Durability	3-5 Years
Application temperature	From +80°C to +120°C
Temperature resistance	From -50°C to +130°C
Breaking strength	37.2 N/10mm
Peel adhesion	2.5 N
Gray Level	4-5



CL-PW-01
Matte Pearlescent White





CL-PW-02
Gloss Pearlescent White



Mysterious Chrome Rainbow Vinyl

Series	1000
Brand	CARLIKE™
Size	1.35x20M/4.4x65FT
Model number	CL-CR
Film produce technology	High polymeric calendered
Adhesive type	Initial low viscosity glue
Film thickness	120micron, 4.8mil
Adhesive thickness	30µm
Air bubble free	Yes
Durability	1-3 Years
Application temperature	From +80°C to +120°C
Temperature resistance	From -50°C to +130°C

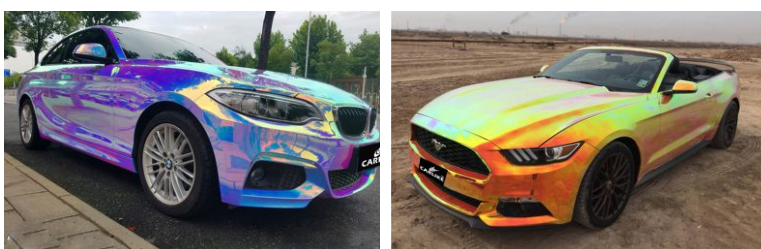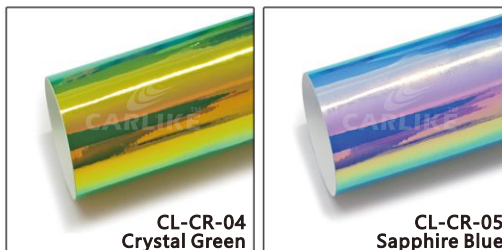

Chrome Mirror Vinyl

Series	1000
Brand	CARLIKE™
Size	1.52x18M/5x59FT
Model number	CL-SCM
Film produce technology	High polymeric calendered
Adhesive type	Initial low viscosity glue
Film thickness	120micron, 4.8mil
Adhesive thickness	30µm
Air bubble free	Yes
Durability	1-3 Years
Application temperature	From +80°C to +120°C
Temperature resistance	From -50°C to +130°C




Chrome Matte Vinyl

Series	1000
Warranty	1 Year
Brand	CARLIKE™
Size	1.52x18M/5x59FT
Model number	CL-CM
Film produce technology	High polymeric calendared
Adhesive type	Initial low viscosity glue
Film thickness	150micron, 6mil
Adhesive thickness	30µm
Air bubble free	Yes
Durability	1-3 Years
Application temperature	From +80°C to +120°C
Temperature resistance	From -50°C to +130°C



Chrome Gloss Vinyl

Series	1000
Warranty	1 Year
Brand	CARLIKE™
Size	1.52x18M/5x59FT
Model number	CL-CG
Film produce technology	High polymeric calendared
Adhesive type	Initial low viscosity glue
Film thickness	130micron, 5.2mil
Adhesive thickness	30µm
Air bubble free	Yes
Durability	1-3 Years
Application temperature	From +80°C to +120°C
Temperature resistance	From -50°C to +130°C

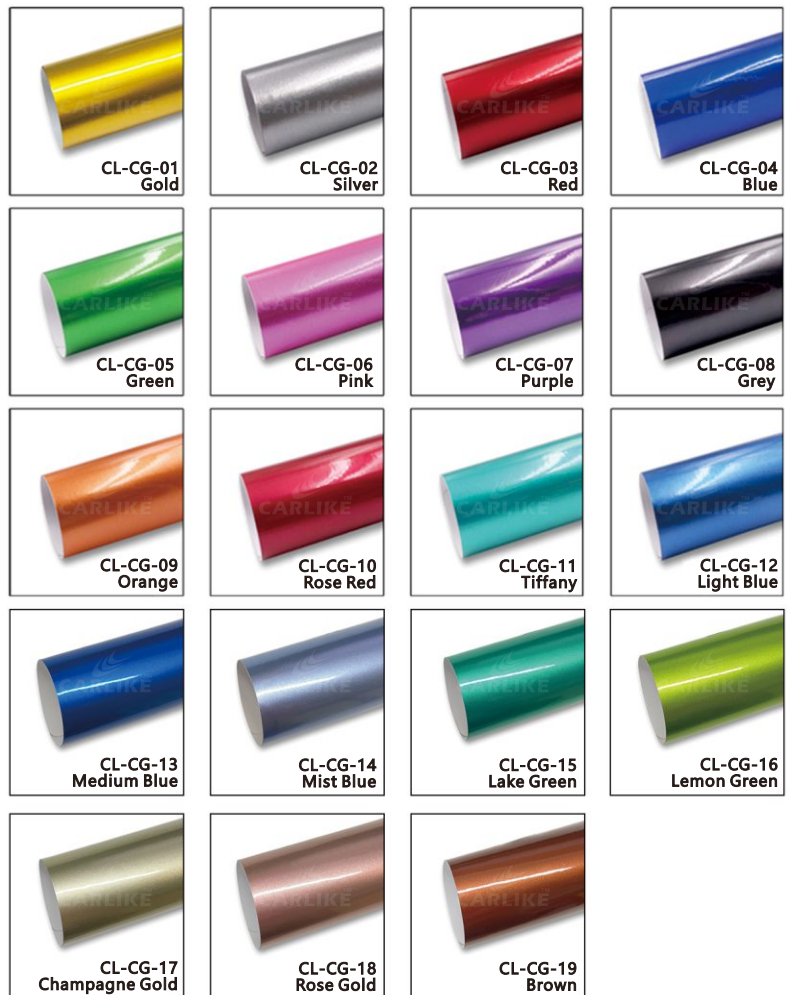

Chrome Laser Vinyl

Series	1000
Brand	CARLIKE™
Size	1.52x18M/5x59FT
Model number	CL-LS
Film produce technology	High polymeric calendered
Adhesive type	Initial low viscosity glue
Film thickness	140micron, 5.6mil
Adhesive thickness	30µm
Air bubble free	Yes
Durability	1-3 Years
Application temperature	From +80°C to +120°C
Temperature resistance	From -50°C to +130°C




Super Matte Pearly Vinyl

Series	1000
Warranty	1 Year
Brand	CARLIKE™
Size	1.52x18M/5x59FT
Model number	CL-MP
Film thickness	130micron, 5.2mil
Durability	1-3 Years




Super Gloss Sunroof Film

Series	1000
Warranty	1 Year
Brand	CARLIKE™
Size	1.35x15M/4.4x49FT 1.52x30M/5x98FT
Model number	CL-SR
Film thickness	150micron, 6mil
Adhesive thickness	30µm
Air bubble free	Yes
Durability	1-3 Years

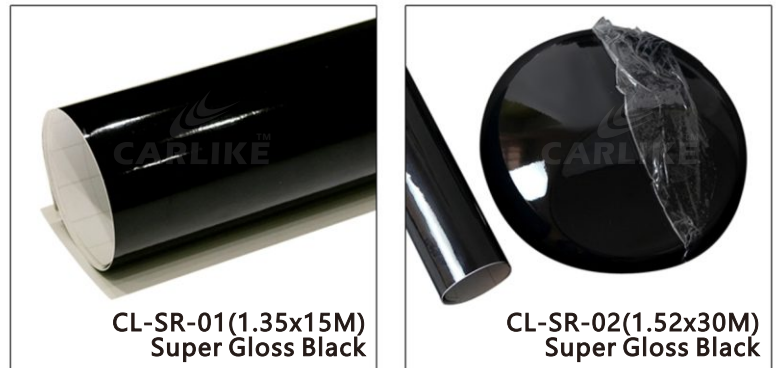


Super Gloss Vinyl

Series	1000
Warranty	1 Year
Brand	CARLIKE™
Size	1.52x18M/5x59FT
Model number	CL-SG
Film produce technology	High polymeric calendered
Adhesive type	Initial low viscosity glue
Film thickness	120micron, 4.8mil
Adhesive thickness	30µm
Air bubble free	Yes
Durability	1-3 Years
Application temperature	From +80°C to +120°C
Temperature resistance	From -50°C to +130°C

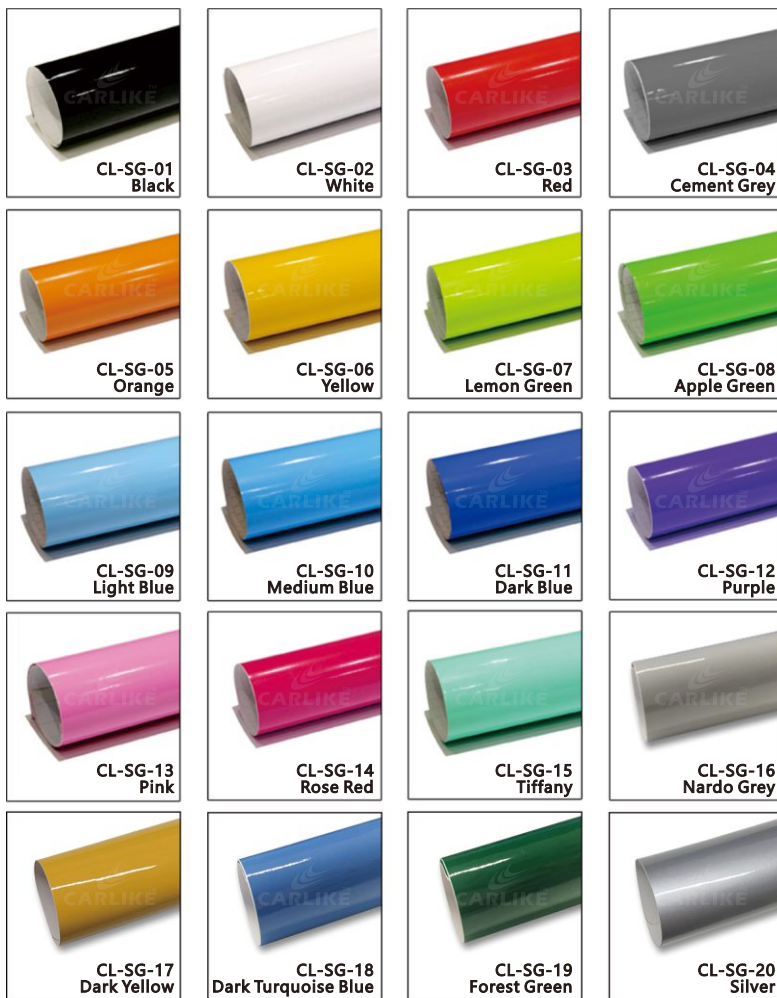

Aluminum Brushed Vinyl

Series	1000
Warranty	1 Year
Brand	CARLIKE™
Size	1.52x18M/5x59FT
Model number	CL-AB
Film produce technology	High polymeric calendered
Adhesive type	Initial low viscosity glue
Film thickness	180micron, 7.2mil
Adhesive thickness	30µm
Air bubble free	Yes
Durability	1-3 Years
Application temperature	From +80°C to +120°C
Temperature resistance	From -50°C to +130°C

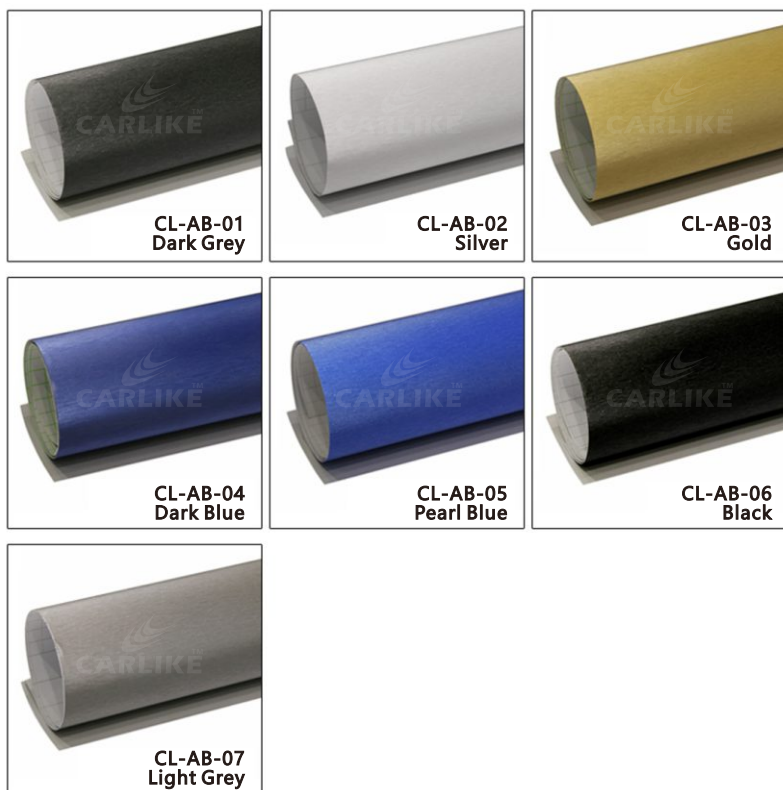


Marble Vinyl

Series	1000
Warranty	1 Year
Brand	CARLIKE™
Size	1.52x20M/5x65FT
Model number	CL-MV
Film produce technology	High polymeric calendered
Adhesive type	Initial low viscosity glue
Film thickness	180micron, 7.2mil
Adhesive thickness	30µm
Air bubble free	Yes
Durability	1-3 Years



CL-MV-01 Black

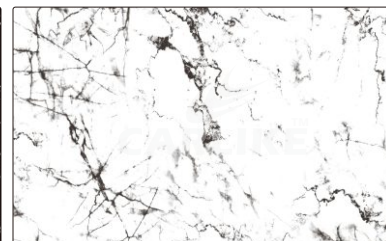

CL-MV-02 White




Super Matt Vinyl

Series	1000
Warranty	1 Year
Brand	CARLIKE™
Size	1.52x18M/5x59FT
Model number	CL-SM
Film produce technology	High polymeric calendered
Adhesive type	Initial low viscosity glue
Film thickness	120micron, 4.8mil
Adhesive thickness	30µm
Air bubble free	Yes
Durability	1-3 Years
Application temperature	From +80°C to +120°C
Temperature resistance	From -50°C to +130°C



Chrome Brushed Vinyl

Size	1.52x18M/5x59FT
Model number	CL-CB
Film produce technology	High polymeric calendered
Adhesive type	Removable
Film thickness	120micron, 4.8mil
Adhesive thickness	30µm
Air bubble free	Yes
Durability	1-3 Years
Application temperature	From +80°C to +120°C
Temperature resistance	From -50°C to +130°C

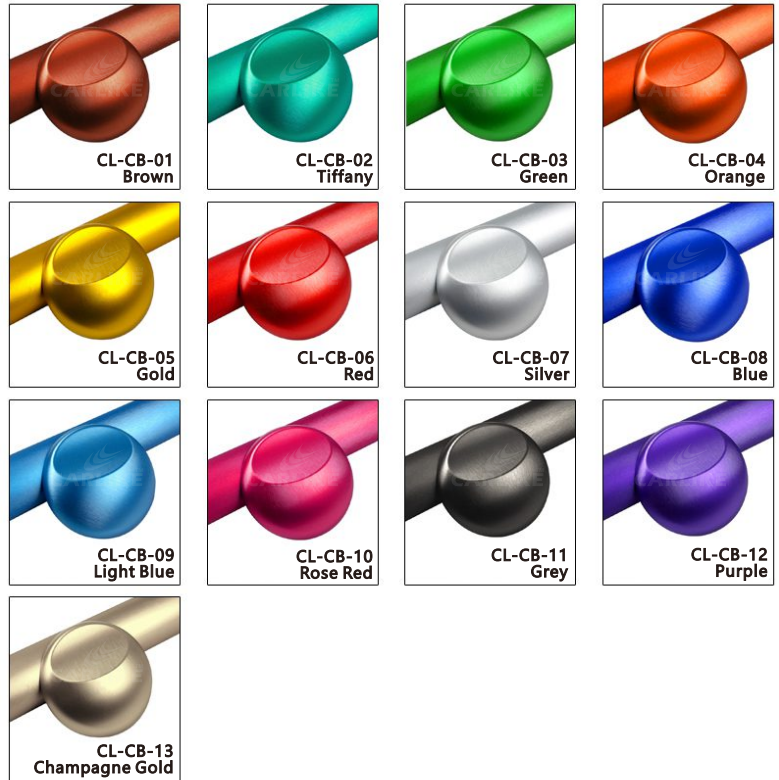

Photoluminescent Vinyl

Size	1.52x20M/5x65FT
Model number	CL-PL
Film produce technology	High polymeric calendered
Adhesive type	Removable
Film thickness	190micron, 7.6mil
Adhesive thickness	30µm
Air bubble free	Yes
Durability	1-3 Years
Application temperature	From +80°C to +120°C
Temperature resistance	From -50°C to +130°C




Matte Glitter Vinyl

Size	1.52x28M/5x91FT
Model number	CL-MG
Film produce technology	High polymeric calendared
Adhesive type	Removable
Film thickness	140micron, 5.6mil
Adhesive thickness	30µm
Air bubble free	Yes
Durability	1-3 Years
Application temperature	From +80°C to +120°C
Temperature resistance	From -50°C to +130°C



Leather Vinyl

Size	1.52x28M/5x91FT
Model number	CL-LE
Film produce technology	High polymeric calendared
Adhesive type	Removable
Film thickness	140micron, 5.6mil
Adhesive thickness	30µm
Air bubble free	Yes
Durability	1-3 Years
Application temperature	From +80°C to +120°C
Temperature resistance	From -50°C to +130°C

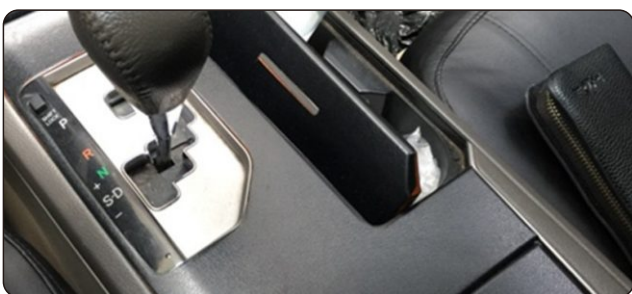

PVC Wooden Film

Size	1.52x18M/5x59FT
Model number	CL-WF
Film produce technology	High polymeric calendered
Adhesive type	Removable
Film thickness	180micron, 7.2mil
Adhesive thickness	30µm
Air bubble free	Yes
Durability	1-3 Years
Application temperature	From +80°C to +120°C
Temperature resistance	From -50°C to +130°C




Camouflage Vinyl

Size	1.52x30M/5x98FT
Model number	CL-CA
Film produce technology	High polymeric calendered
Adhesive type	Removable
Film thickness	130micron, 5.2mil
Adhesive thickness	30µm
Air bubble free	Yes
Durability	1-3 Years
Application temperature	From +80°C to +120°C
Temperature resistance	From -50°C to +130°C





6D Carbon Fiber Vinyl

Size	1.52x18M/5x59FT
Model number	CL-6DCF
Film produce technology	High polymeric calendered
Film thickness	180micron, 7.2mil
Adhesive type	Removable
Air bubble free	Yes
Durability	1-3 Years
Application temperature	From +80°C to +120°C
Temperature resistance	From -50°C to +130°C

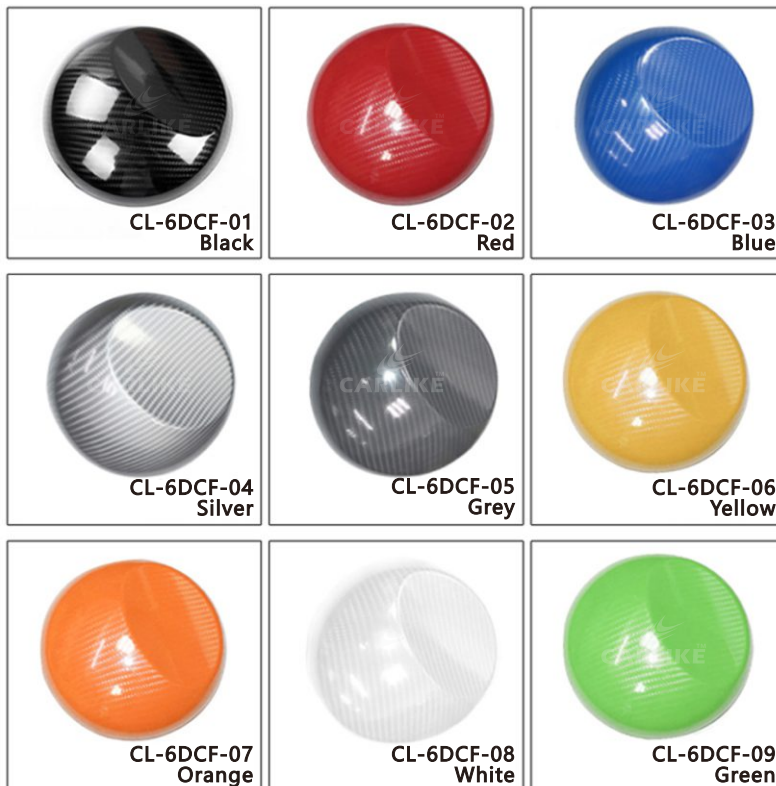




5D Carbon Fiber Vinyl

Size	1.52x18M/5x59FT
Model number	CL-5DCF
Film produce technology	High polymeric calendered
Film thickness	180micron, 7.2mil
Adhesive type	Removable
Air bubble free	Yes
Durability	1-3 Years
Application temperature	From +80°C to +120°C
Temperature resistance	From -50°C to +130°C

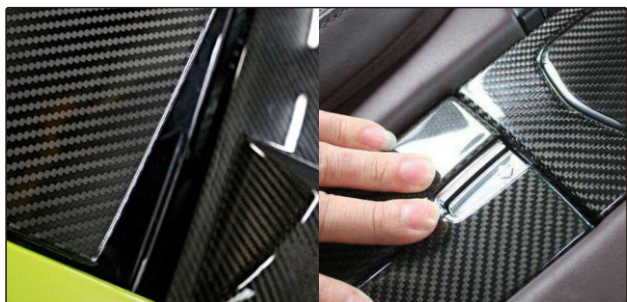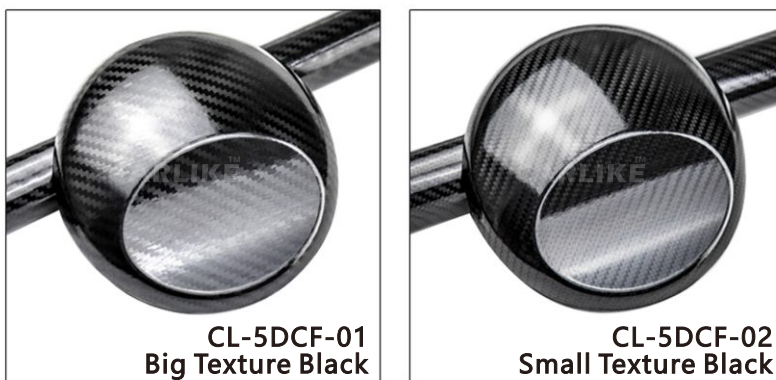



4D Carbon Fiber Vinyl

Size	1.52x28M/5x91FT
Model number	CL-4DCF
Film produce technology	High polymeric calendered
Film thickness	150micron, 6mil
Adhesive type	Removable
Air bubble free	Yes
Durability	1-3 Years
Application temperature	From +80°C to +120°C
Temperature resistance	From -50°C to +130°C

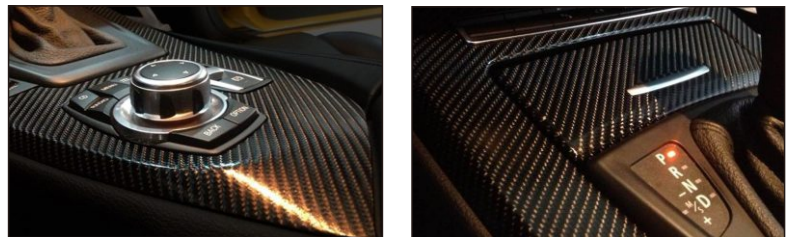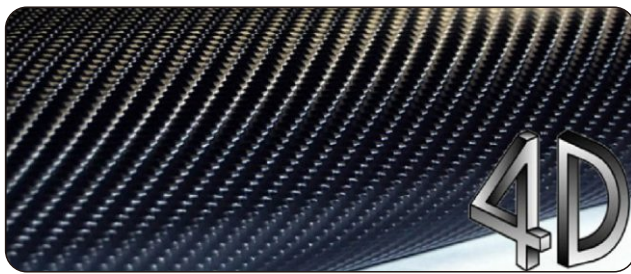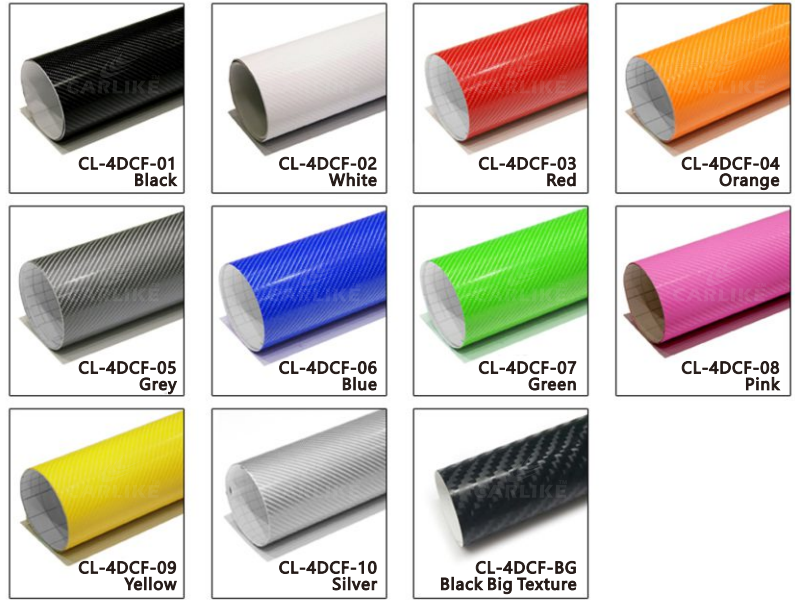




3D Carbon Fiber Vinyl

Size	1.52x28M/5x91FT
Model number	CL-3DCF
Film produce technology	High polymeric calendered
Film thickness	150micron, 6mil
Adhesive type	Removable
Air bubble free	Yes
Durability	1-3 Years
Application temperature	From +80°C to +120°C
Temperature resistance	From -50°C to +130°C

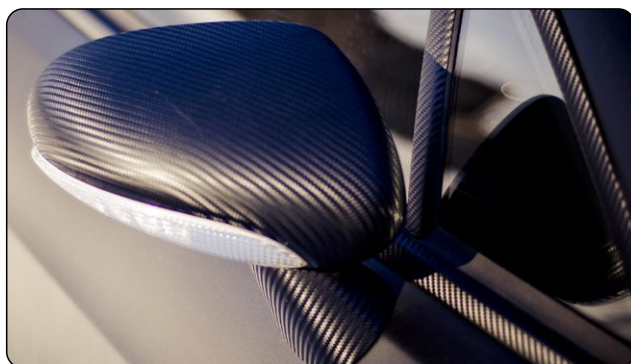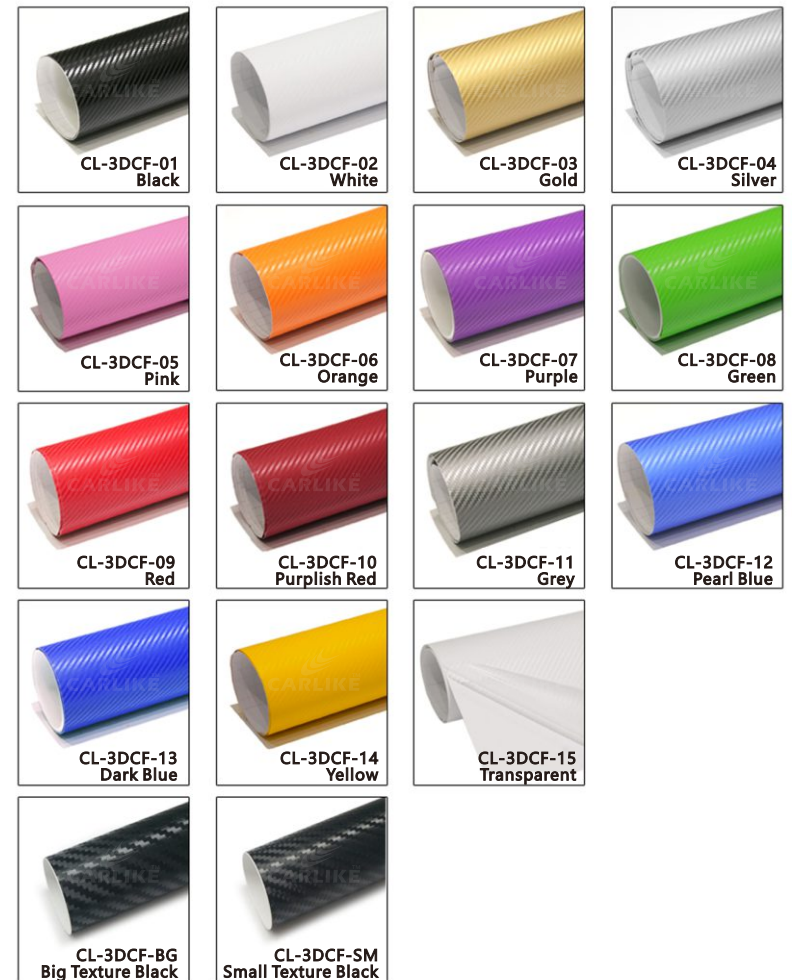



2D Carbon Fiber Vinyl

Size	1.52x28M/5x91FT
Model number	CL-2DCF
Film produce technology	High polymeric calendered
Film thickness	150micron, 6mil
Adhesive type	Removable
Air bubble free	Yes
Durability	1-3 Years
Application temperature	From +80°C to +120°C
Temperature resistance	From -50°C to +130°C

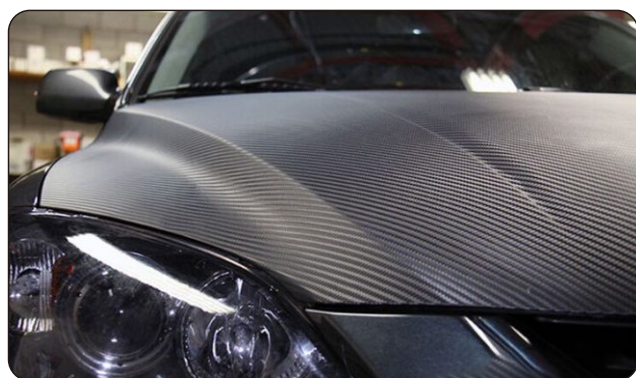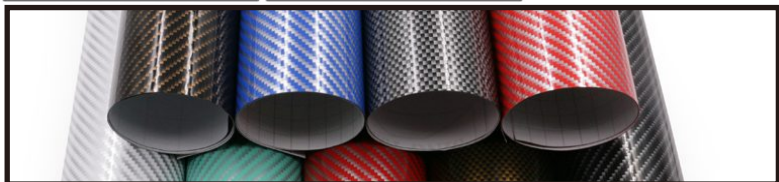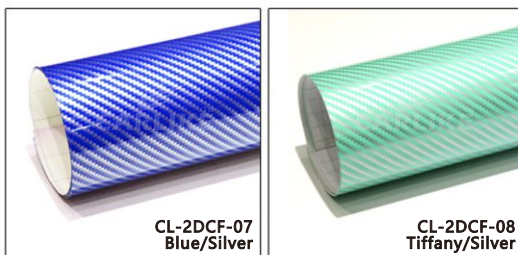

Chameleon Carbon Fiber Vinyl

Size	1.52x28M/5x91FT
Model number	CL-CCF
Film produce technology	High polymeric calendered
Film thickness	220micron, 8.8mil
Adhesive type	Removable
Air bubble free	Yes
Durability	1-3 Years
Application temperature	From +80°C to +120°C
Temperature resistance	From -50°C to +130°C

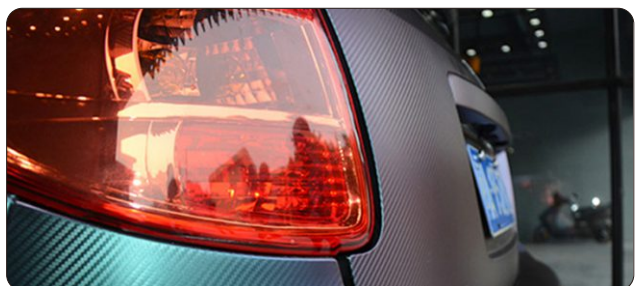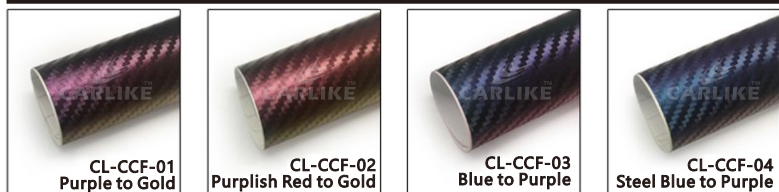


Car Light Film

Size	0.3x9M (Width 0.4M/0.6M/1.2M Available)
Film produce technology	High polymeric calendered
Thickness	120 micron, 4mil
Adhesive type	Removable
Application method	Wet
Durability	1-3 Years
Produce technology	Calendered




Chameleon Car Light Film

Size	0.3x9M (Width 0.4M/0.6M/1.2M Available)
Film produce technology	High polymeric calendered
Thickness	150 micron, 6mil
Adhesive type	Removable
Application method	Wet
Durability	1-3 Years
Produce Technology	Calendered

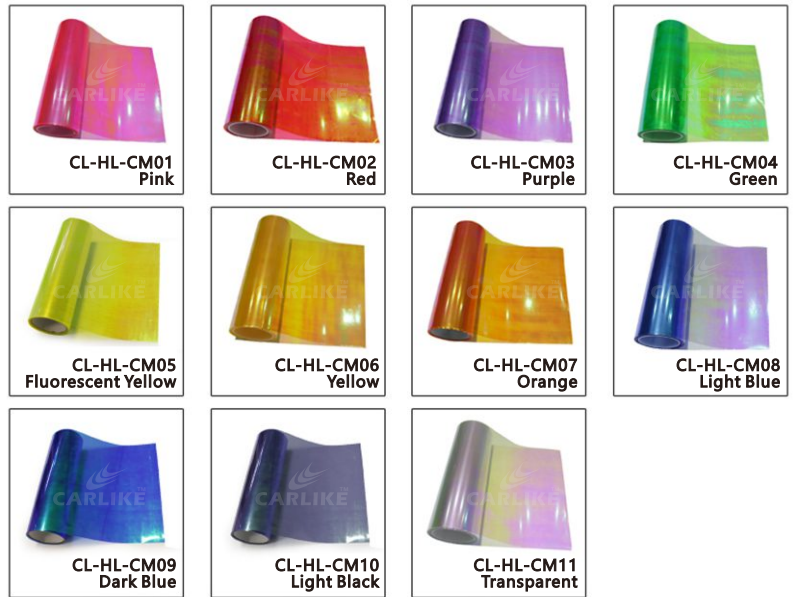

3D Car Light Film

Size	0.3x9M (Width 0.4M/0.6M/1.2M Available)
Film produce technology	High polymeric calendered
Thickness	130 micron, 5.2mil
Adhesive type	Removable
Application method	Wet
Durability	1-3 Years
Produce Technology	Calendered

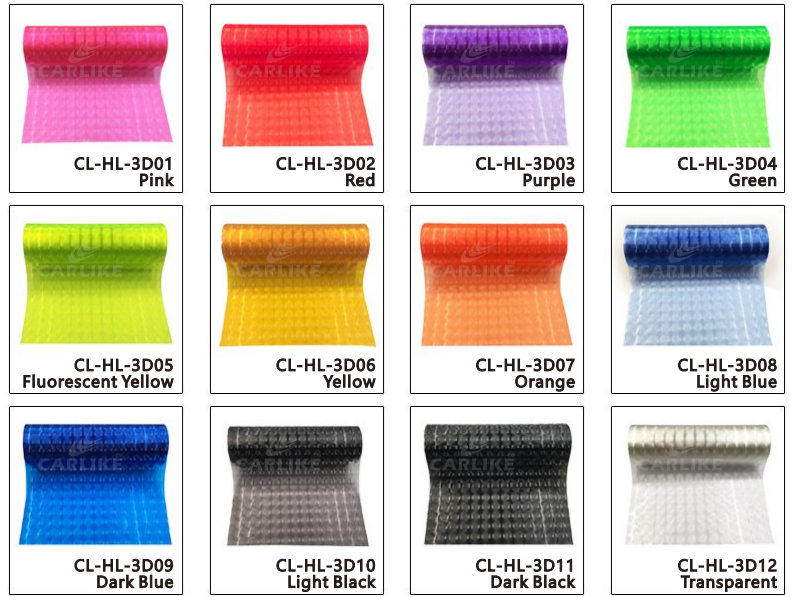

Glitter Car Light Film




Size	0.3x9M (Width 0.4M/0.6M/1.2M Available)
Film produce technology	High polymeric calendered
Thickness	140 micron, 5.6mil
Adhesive type	Removable
Application method	Wet
Durability	1-3 Years
Produce Technology	Calendered



Printed Camouflage Vinyl

Series	1000
Warranty	1 Year
Brand	CARLIKE™
Size	1.52x20M/5x65FT
Model number	CL-MC
Film produce technology	High polymeric calendered
Adhesive type	Initial low viscosity glue
Film thickness	180micron, 7.2mil
Adhesive thickness	30µm
Air bubble free	Yes
Durability	1-3 Years



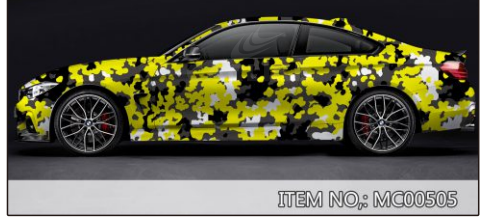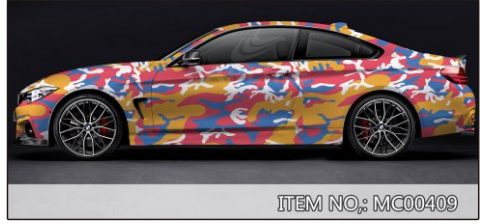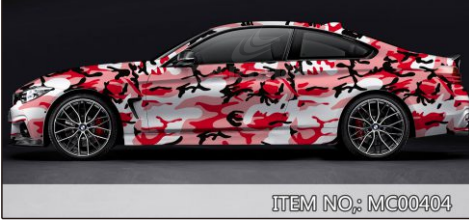



ITEM NO.: MC00509



ITEM NO.: MC00510



ITEM NO.: CL-MV-01



ITEM NO.: MC00601



ITEM NO.: MC00602



ITEM NO.: MC00603



ITEM NO.: MC00604



ITEM NO.: MC00605



ITEM NO.: MC00606



ITEM NO.: MC00701



ITEM NO.: MC00702



ITEM NO.: MC00703



ITEM NO.: MC00704



ITEM NO.: MC00705



ITEM NO.: MC00706



ITEM NO.: MC00707



ITEM NO.: MC00708



ITEM NO.: MC00709



ITEM NO.: MC00801



ITEM NO.: MC00802



ITEM NO.: MC00803




ITEM NO.: MC00804



ITEM NO.: MC00805



ITEM NO.: MC00806

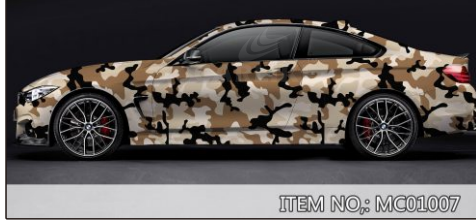



ITEM NO.: MC01103



ITEM NO.: MC01104




ITEM NO.: MC01105



ITEM NO.: MC01106



ITEM NO.: MC01107

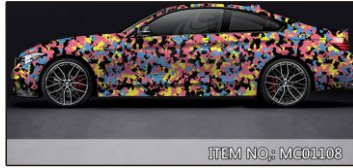

ITEM NO.: MC01108



ITEM NO.: MC01109



ITEM NO.: MC01201



ITEM NO.: MC01202



ITEM NO.: MC01203



ITEM NO.: MC01204



ITEM NO.: MC01205



ITEM NO.: MC01206



ITEM NO.: MC01207



ITEM NO.: MC01301



ITEM NO.: MC01302



ITEM NO.: MC01303



ITEM NO.: MC01304



ITEM NO.: MC01305



ITEM NO.: MC01306



ITEM NO.: MC01307



ITEM NO.: MC01401



ITEM NO.: MC01402



ITEM NO.: MC01403



ITEM NO.: MC01404



ITEM NO.: MC01405



ITEM NO.: MC01406



ITEM NO.: MC01501



ITEM NO.: MC01502



ITEM NO.: MC01503



ITEM NO.: MC01504



ITEM NO.: MC01505



ITEM NO.: MC01506



ITEM NO.: MC01601



ITEM NO.: MC01602



ITEM NO.: MC01603



ITEM NO.: MC01604



ITEM NO.: MC01605



ITEM NO.: MC01606



ITEM NO.: MC01701



ITEM NO.: MC01702



ITEM NO.: MC01703



ITEM NO.: MC01704



ITEM NO.: MC01705



ITEM NO.: MC01706



ITEM NO.: MC01801



ITEM NO.: MC01802



ITEM NO.: MC01803



ITEM NO.: MC01804



ITEM NO.: MC01805



ITEM NO.: MC01806



ITEM NO.: MC01807



ITEM NO.: MC01901



ITEM NO.: MC01902



ITEM NO.: MC01903



ITEM NO.: MC01904



ITEM NO.: MC01905



ITEM NO.: MC01906



ITEM NO.: MC02001



ITEM NO.: MC02002



ITEM NO.: MC02003



ITEM NO.: MC02004



ITEM NO.: MC02005



ITEM NO.: MC02006



ITEM NO.: MC02007



ITEM NO.: MC02008



ITEM NO.: MC02009



ITEM NO.: MC02010



ITEM NO.: MC02901



ITEM NO.: MC04203



ITEM NO.: MC05601



ITEM NO.: MC05602



ITEM NO.: MC05603



ITEM NO.: MC05701



ITEM NO.: TX00701



ITEM NO.: TY00101



ITEM NO.: WL00101



ITEM NO.: XK0301




ITEM NO.: XK0305



ITEM NO.: XK0308

Premium+ Printed Vinyl

Series	1000
Warranty	1 Year
Brand	CARLIKE™
Size	1.52x20M/5x65FT
Model number	CL-CH
Film produce technology	High polymeric calendered
Adhesive type	Initial low viscosity glue
Film thickness	180micron, 7.2mil
Adhesive thickness	30µm
Air bubble free	Yes
Durability	1-3 Years

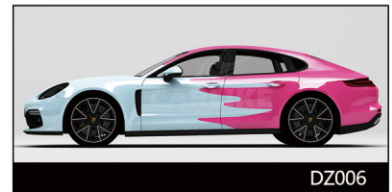



JB013



JB014



JB015



JB016




JB017




JB018



JB019

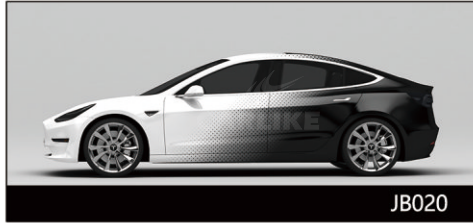

JB020

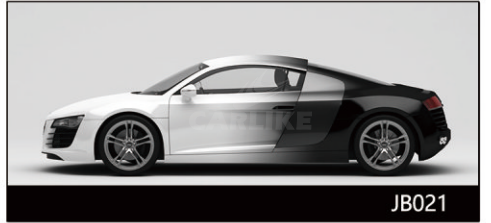

JB021



JB023



JB024



JB025



JB026



JB027



JB028



JB029



JB030



JB031



JB032



JB033



JB034




JB035



JB036



JB037

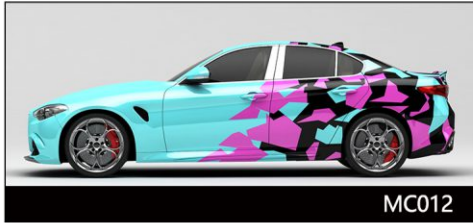

MC012



MC013



MC014



MC015



PM001



PM002



PM003



PM004




PM006



PM007



PM008

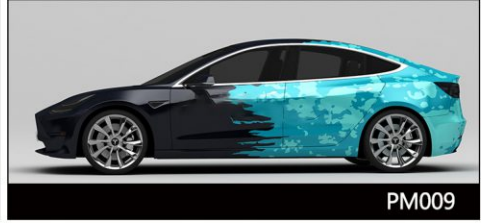

PM009




PM010



PM011



PM012

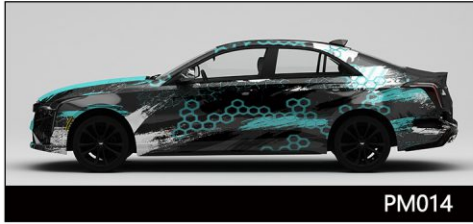

PM014



SD001



SD002



SD003



SD004



SD005



SD006



SD007



SD008



SD009



SD010



SD011



SD012



SD013



SD014



SD015



SD016



TC001



TC002



TC003



TC004



TC005



TC006



TC007



TC008



TC009



TC010



TC011



TC012



TC013



TY001



TY002



TY003



JB038




JB039



JB040



JB041

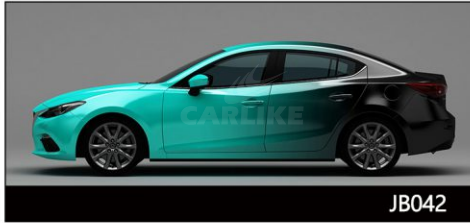

JB042



JB043



JB044



JB045




JB046




JB047



JB048

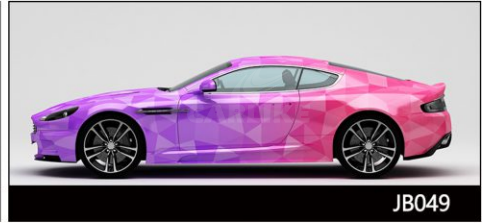

JB049

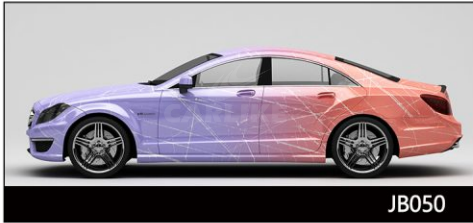

JB050



JB051



JB052



JB053



KT001



KT002



KT003



KT004



KT005



KT006



KT007




KT008



KT009



KT010

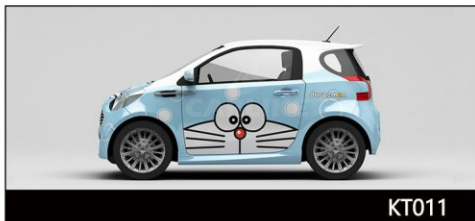

KT011



KT012




KT013



KT014



KT015

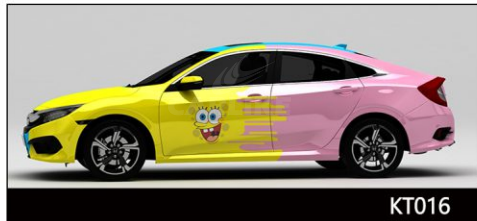

KT016



KT017



KT018



KT019



KT020



KT021




MC001



MC002



MC003

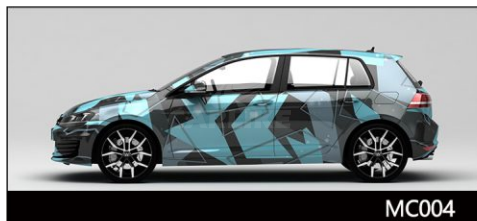

MC004



MC005



MC006



MC007



MC008



MC009



MC010



MC011



TY004



TY005



WL001




WL002



WL003



WL004

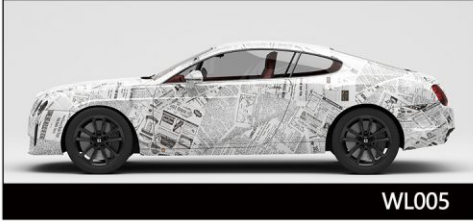

WL005



WL006



WL007



WL008



WL009



WL010



WL011




WL012



WL013



WL014

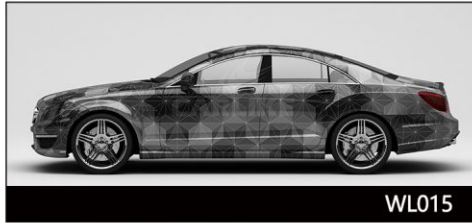

WL015



WL016



WL017



WL018




WL019



WL020



WL021

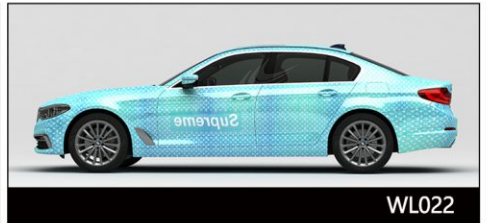

WL022



WL023



XK001



XK002



XK003



XK004



XK005



XK006



XK007




XK008



XK009



XK010

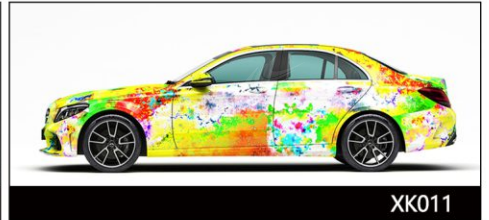

XK011



XK012



ZS001



ZS003



ZS004



ZS005




























ZS006




ZS008



ZS009

				
SQ1 Squeegee	SQ2 Squeegee	SQ3 Squeegee	SQ4 Squeegee	SQ5 Squeegee
				
SQ6 Squeegee	SQ7 Squeegee	SQ8 Squeegee	SQ9 Squeegee	SQ10 Squeegee
				
SQ11 Squeegee	SQ12 Squeegee	SQ13 Squeegee	SQ14 Squeegee	SQ15 Squeegee
				
SQ16 Squeegee	SQ17 Squeegee	SQ18 Squeegee	SQ19 Squeegee	SQ20 Squeegee
				
T1 Knifeless tape	T2 Woolen squeegee	T3 Squeegee for gap	T4 Cutter	T5 Remove glue squeegee



T6
Cutter



T7
Knife



T8
Knife



T9
Tools



T10
Tool box



T11
Pad for cut vinyl



T12
Gloves



T13
Magnet



T14
Knife



T15
Primer glue



T16
Heat gun



T17
Watering can



T18
Buckskin sticker
for squeegee



T19
Hood model



T20
Car model



T21
3M Primer Glue



T22
Magnet



T23
Remove
glue squeegee



T25
Cut pad



T26
Ceeding tool 4 in 1



T27
Weeding tool

APPLICATION INSTRUCTIONS

READ THOROUGHLY BEFORE APPLICATION

The car paint surface must be clean and free of dirt and wax prior to application


Should Apply at temperatures between 80°C and 120°C to a smooth, flat surface.

1. Trim CARLIKE Vinyl Wrap to fit a proper location.
2. CARLIKE Vinyl Wrap is produced with new air bubble free technology, high density air channels, dry application is available, easy to install, and save installation time.
3. Peel off CARLIKE Vinyl Wrap from the liner paper at one end, and place into position on the vehicle. Continue to remove the liner paper as you apply using a squeegee to rub into place.
4. Initial low viscosity glue, adjust positioning the CARLIKE Vinyl Wrap on the car paint more quickly.
5. Inspect the application. Any bubbles can be punctured with razor tip and carefully squeegee down.
6. Allow 24 hours before cleaning vehicle at an automatic or manual high-pressure car wash.


HEAT FORMING

CARLIKE vinyl film can be formed around some compound-curved surfaces using a hair dryer or heat gun. Use the tool to heat the film (2 - 3 seconds) until it softens and begins to wrap itself to the contours/edge of the application surface. While the film is still warm, use a squeegee or fingertips to apply pressure to the film to help shape it to the contours. Be careful not to over-stretch the film when it is heated.


If you wrinkle the film during installation, let it cool and gently lift the film from the surface and re-apply, heat the wrinkled film can be restore flat.

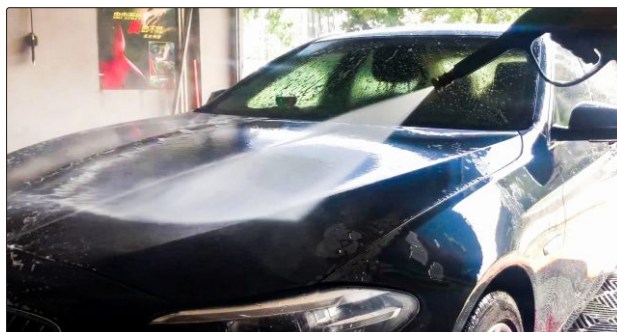


Wash car body

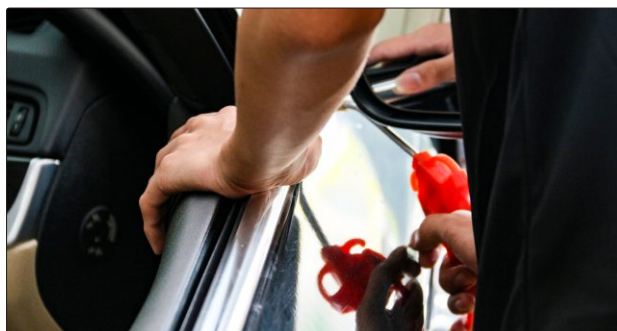

Clean car body gap

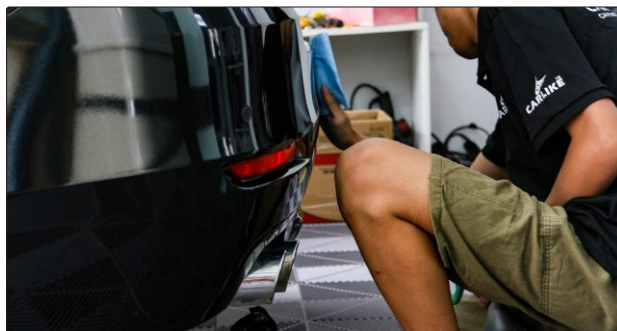

Wipe dry car body

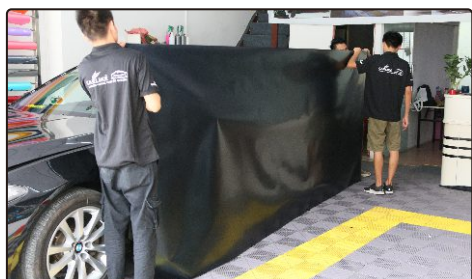

1. Measure and cut the size



2. Stick it on car body



3. Use squeegee and heat gun to make it flat



4. Use squeegee get bubble out



5. Cut off extra part



6. Finished

PRODUCT WARRANTY

CARLIKE warranty policy:

3000 series 3 years warranty, 1000 series 1 year warranty, (No warranty for the 3 items: CL-CR Chrome Rainbow, CL-SCM Chrome Mirror, CL-LS Chrome Laser) after the product is installed, according to the classification of the product, the following quality assurance is provided within the corresponding unified warranty time:

1. Ensure the self-adhesive properties of the film, without non-touch deformation, delamination or natural separation from the car body.
2. Ensure that the appearance of the film surface does not produce obvious sun light fading.
3. Ensure that the film and the paint surface are peeled off with almost no residual glue. The original paint has no shedding damage (the paint is peeled off or damaged in the secondary spray part, which is not within the guarantee range, and the result of the inspection of the paint composition of the authoritative organization shall prevail).
4. CARLIKE and the construction unit will not be responsible for any damage caused by car body, membrane damage and improper maintenance caused by natural disasters, external forces or strong acid and alkali objects.
5. When the film is removed, it shall be professionally removed by the installer. The film body damage or paint surface damage caused by the owner's unauthorized operation shall not be undertaken by CARLIKE and the install shop.
6. If the scratches or damage caused by human beings can be repaired or replaced by the construction unit, the damaged parts can be repaired at the install shop.



PRODUCT MAINTENANCE

1. In the initial stage after install (within 3 days from the delivery date), the adhesion of the film is relatively low. Just in case, do not touch the film surface, especially the edge portion.
2. In the initial stage after install, there may be a possibility of subsequent generation of bubbles or blisters, which is a normal phenomenon and can naturally disappear after about 10 days. If you are in a hurry, you can go to the construction unit for quick processing.
3. Wash the vehicle after it is completely dry (about 1 week after install).
4. Please avoid using adhesives things to stick the surface of the film.
5. Please avoid using cleaning tools that are easy to damage the membrane surface.
6. Do not use a brush, abrasive or sponge with abrasive to clean the membrane surface.
7. Wipe the surface of the film with a soft damp cloth and water. If you need to use a cleaning agent, use a neutral detergent.



 **CARLIKE**TM  **PREMIUM⁺**
CAR WRAPPING VINYL
CARLIKE MAKE YOUR CAR SPECIAL



Contact Us

Email: sales@carlikewrap.com

Website: carlikewrap.com

Facebook: facebook.com/carlikewrap

Stay Informed: [carlikewrap](#)

